

Hand Dryer

TSL.3002

The Splash Lab TSL.3002 is a slim-line high speed hand dryer with the advantage of a 15 second drying time and low running costs.

Finish	Codes	LRV*
● Satin	TSL.3002.CS	51
● Black	TSL.3002.BK	3
● Brass	TSL.3002.BR	40
● Copper	TSL.3002.CP	19

Light Reflectance Value*

+ Satin



+ Black



+ Brass



+ Satin



+ Copper



Technical Data

Power Consumption	4.2A
Drying time	less than 15 seconds
Weight	4.9kg
Stainless steel	AISI 304
Noise levels	Min 69dB to 76.6dB Max @ 1 metre
Air speed	95-115m/s
Heating element	450W adjustable
Motor type	Brush type, Dual ball-bearings
Motor power	250W – 500W
Motor	16,000 – 29,000 RPM variable speed 74m³/h
Air Flow	74m³/h
Sensor range	100 – 230mm variable; standard set at 17cm
Insulation	Class 1
IP rating	IP24
Warranty	1 Year parts and unlimited digital support (Motor brushes excluded as these are a wearing part, and dependent on usage.)

Installation requirements

Installation height	(All dimensions taken from finished floor level to base of hand dryer) Male washroom 1220mm Female washroom 1120mm Primary school washroom 910mm Wheelchair accessible 910mm
Washroom layout	Number of hand dryers to be fitted – for toilet areas with normal frequency; one dryer per two washbasins. In high-frequency use toilet areas; two dryers per 3 basins. In very high frequency use washrooms, one dryer per basin. Mounting template included with dryer. Ideal location – between washbasin and exit. If mounted over a washbasin, recommended minimum distance from dryer to basin should be 300mm. Dryer can be installed behind a mirror or cabinet, but must be accessible for maintenance. In this application, the dryer must be mounted with the base flush with the base of the mirror or cabinet so that the sensor is not obstructed. Recommended mounting substrate is a solid wall. If dryer is installed on a stud / plasterboard wall, sound levels are likely to exceed 78dB.

Compliance & certificates

CE

UL

RoHS

UKCA

Included

Hand Dryer

Security allen key


Rubber mounting bushes

Screws

Warranty

1 Year limited - unlimited digital support

+ Technical drawing

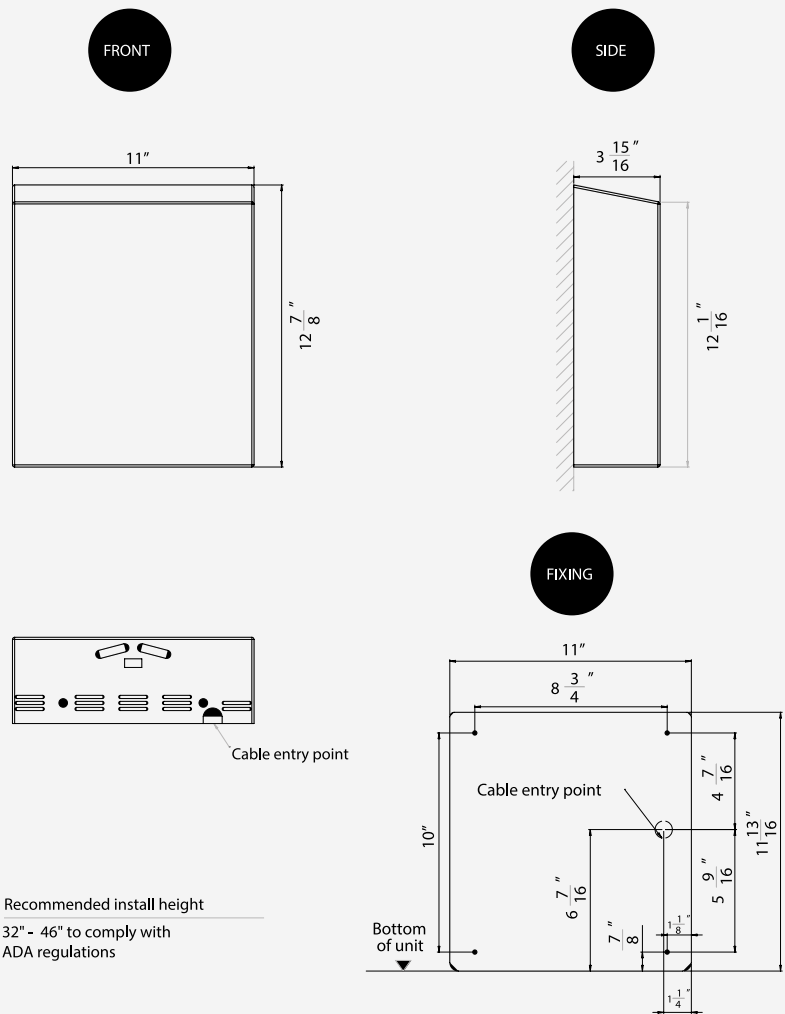

Spare parts

If a situation arises where you require replacement components outside of a maintenance contract, there may be provision to obtain spare parts. Providing the components are under warranty and the parts have become non-functioning during normal use within their assumed usable life, they may be replaced. Should a replacement mains power supply be required it is imperative that an identical type is used. Contact **The Splash Lab** for further information.

Part	Codes
Motor	TSLP.260040
PCB (includes sensor)	TSLP.409498

Related products



IR Sensor Tap
TSL.882



Wall Mounted Sensor Soap Dispenser
TSL.467