

# **Hand Dryer**

TSL.3002

The Splash Lab TSL.3002 is a slim-line high speed hand dryer with the advantage of a 15 second drying time and low running costs.

Finish Codes		LRV*	
<ul><li>Satin</li></ul>	TSL.3002.CS	58	
<ul><li>Black</li></ul>	TSL.3002.BK	3	
<ul><li>Brass</li></ul>	TSL.3002.BR	40	
<ul><li>Copper</li></ul>	TSL.3002.CP	19	
<ul><li>Bronze</li></ul>	TSL.3002.BZ	17	

<sup>\*</sup>Light reflectance value













REV 2025 28-Aug UK: +44 (0) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.

#### **Technical Data**

Power consumption	4.2A
Drying time	less than 15 seconds
Weight	4.9kg
Stainless steel	AISI 304
Noise levels	Min 69dB to 76.6dB Max @ 1 metre
Air speed	95-115m/s
Heating element	450W adjustable
Motor type	Brush type, Dual ball-bearings
Motor power	250W - 500W
Motor	16,000 - 29,000 RPM variable speed 74m³/h
Air flow	74m ³h
Sensor range	100 - 230mm variable; standard set at 17cm
Insulation	Class 1
IP rating	IP24
Frequency	50Hz & 60Hz
Air temperature	55°

# Installation requirments

	(All dimensions taken from finished floor level to base of hand dryer)
	Male washroom 1220mm
Installation height	Female washroom 1120mm
	Primary school washroom 910m
	Wheelchair accessible 910mm
	Number of hand dryer to be fitted - for toilet areas with normal frequency; one dryer
	per two washbasins. In high-frequency use toilet areas; two dryers per 3 basins. In
	very high frequency use washrooms, one dryer per basin. Mounting template included
	with dryer.
	Ideal location - between washbasins and exit. If mounted over a washbasin,
Washroom layout	recommended minimum distance from dryer to basin should be 300mm
	Dryer can be installed behind a mirror or cabinet, but must be accessible for
	maintenance. In this application, the dryer must be mounted with the base flush with
	the base of the mirror of cabinet so that the sensor is not obstructed.
	Recommended mounted substrate is a solid wall. If dryer is installed on a stud /
	plasterboard wall, sound levels are likely to exceed 78dB.

# Compliance certificates

CE
UL
ROHS
UKCA
G-Mark




REV 2025 26-Aug UK: +44 (0) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.

### Included

Motor TSLP.260040

PCB (includes sensor) TSLP.409498

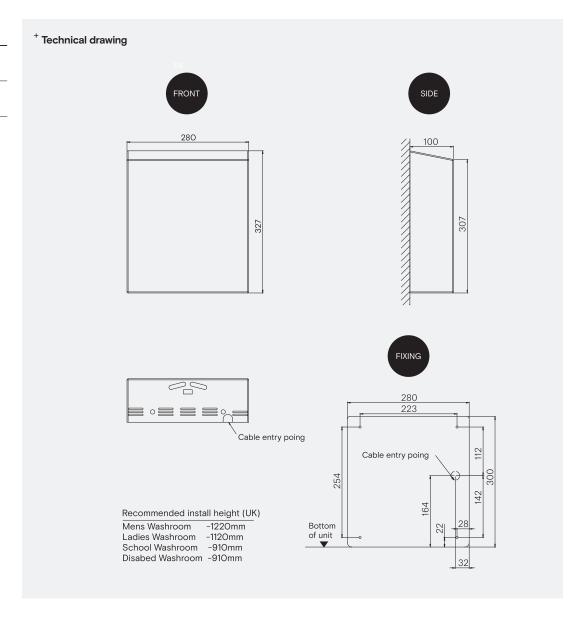

## Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com

If additional spare parts are required and are not listed below, please contact us at info.uk@thesplashlab.com

Part	Codes
HEPA filter assembly	TSLP.20110
HEPA filter refill	TSLP.230330

## Related products



Radius Auspex Tap 220mm TSL.894



Radius Auspex Tap 150mm TSL.895



Radius Auspex Tap Square Neck TSL.893

B Installation

Figure B		

REV 2025 26-Aug UK: +44 (O) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.