

Hand Dryer

TSL.3002

The Splash Lab TSL.3002 is a slim-line high speed hand dryer with the advantage of a 15 second drying time and low running costs.

| Finish | Codes | LRV* |
|----------|-------------|------|
| ● Satin | TSL.3002.CS | 58 |
| ● Black | TSL.3002.BK | 3 |
| ● Brass | TSL.3002.BR | 40 |
| ● Copper | TSL.3002.CP | 19 |
| ● Bronze | TSL.3002.BZ | 17 |

Light Reflectance Value*

+ Satin



+ Black



+ Brass



+ Bronze



+ Copper



Technical Data

| | |
|-------------------|--|
| Power Consumption | 4.2A |
| Drying time | less than 15 seconds |
| Weight | 4.9kg |
| Stainless steel | AISI 304 |
| Noise levels | Min 69dB to 76.6dB Max @ 1 metre |
| Air speed | 95-115m/s |
| Heating element | 450W adjustable |
| Motor type | Brush type, Dual ball-bearings |
| Motor power | 250W – 500W |
| Motor | 16,000 – 29,000 RPM variable speed 74m³/h |
| Air Flow | 74m³/h |
| Sensor range | 100 – 230mm variable; standard set at 17cm |
| Insulation | Class 1 |
| IP rating | IP24 |
| Frequency | 50Hz & 60Hz |
| Air Temperature | 55° |

Installation requirements

| | |
|---------------------|--|
| Installation height | (All dimensions taken from finished floor level to base of hand dryer) Male washroom 1220mm Female washroom 1120mm Primary school washroom 910mm Wheelchair accessible 910mm |
| Washroom layout | Number of hand dryers to be fitted – for toilet areas with normal frequency; one dryer per two washbasins. In high-frequency use toilet areas; two dryers per 3 basins. In very high frequency use washrooms, one dryer per basin. Mounting template included with dryer. Ideal location – between washbasin and exit. If mounted over a washbasin, recommended minimum distance from dryer to basin should be 300mm. Dryer can be installed behind a mirror or cabinet, but must be accessible for maintenance. In this application, the dryer must be mounted with the base flush with the base of the mirror or cabinet so that the sensor is not obstructed. Recommended mounting substrate is a solid wall. If dryer is installed on a stud / plasterboard wall, sound levels are likely to exceed 78dB. |

Compliance & certificates

CE

UL

RoHS

UKCA

Key Components/Spare Parts

Motor
TSLP.260040


PCB (includes sensor)
TSLP.409498

Optional Extras

HEPA Filter Assembly
TSLP.20110

HEPA Filter Refill
TSLP.230330

+ Technical drawing

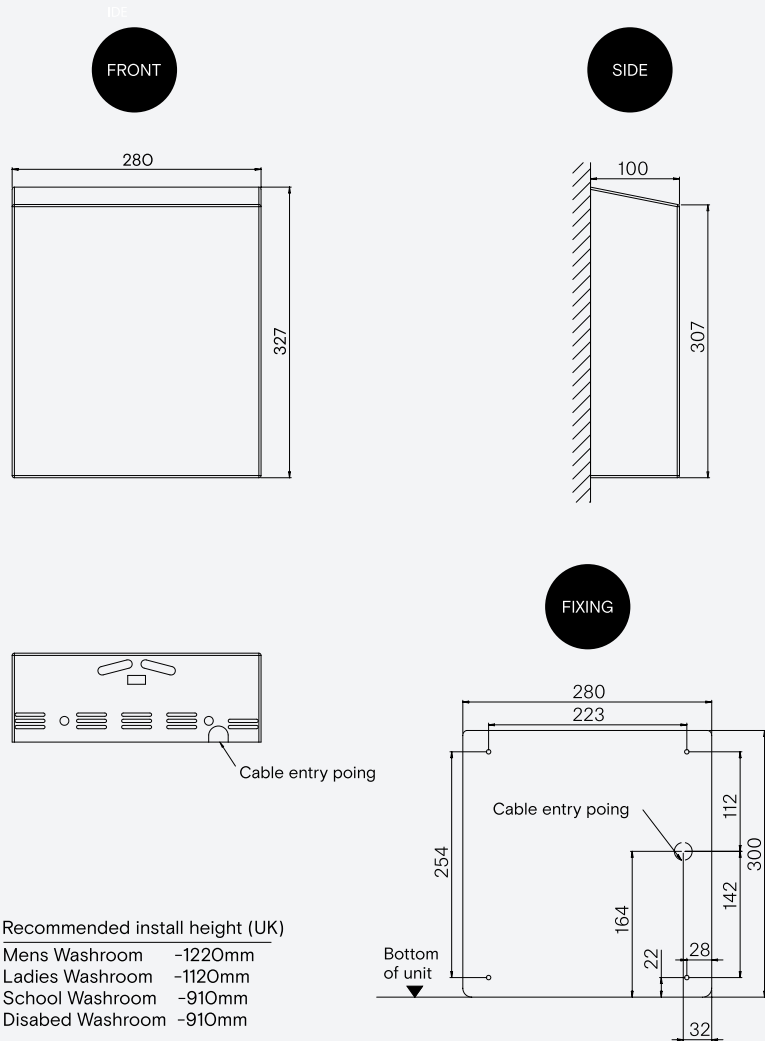

Recommended install height (UK)

| | |
|-------------------|---------|
| Mens Washroom | -1220mm |
| Ladies Washroom | -1120mm |
| School Washroom | -910mm |
| Disabled Washroom | -910mm |

Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com

If additional spare parts are required and are not listed above, please contact us at info.uk@thesplashlab.com

Related products



IR Sensor Tap
TSL.882



150mm IR Sensor Tap
TSL.884



Sensor Deck Mounted Tap / Small
TSL.990



Sensor Deck Mounted Tap / Large
TSL.960