

Wall Mounted Manual Soap Dispenser

TSL.470

The TSL.470 is a stainless-steel pump-action wall mounted soap dispenser, that utilises a concealed soap replenishment system.

Finish	Codes	LRV*
● Satin	TSL.470.CS	51
● Black	TSL.470.BK	3
● Brass	TSL.470.BR	40
● Copper	TSL.470.CP	19

Light Reflectance Value*

+ Satin



+ Black



+ Brass



+ Satin



+ Copper



Technical Data

Weight	420g
Recommended soap viscosity	100 to 3800cPs Liquid soap only. Not for use with foam soap, alcohol gel or hand sanitiser
Body	AISI316 stainless steel
Recommended soap system	TSL.ST Series, to be specified separately
Feed pipe connection	8mm push-fit connector to L-ST series feed system
Tested to	2,000,000 depressions
Standard discharge	1cc

Installation requirements

Wall cut out	Ø17mm diameter
Maximum wall thickness	12 – 50mm
Reservoir location	Soap reservoir must be mounted below the dispenser. The dispenser is not designed to draw soap from a reservoir mounted above.

Continued on next page

Included

Wall Mounted Manual Soap Dispenser

Dispenser mechanism

Wall flange - large

Rubber backing washer

Steel backing washer

Fixing nuts


Pushfit elbow pipe connector

Straight push-in pipe connector

Warranty

1 Year limited - unlimited digital support

+ Technical drawing

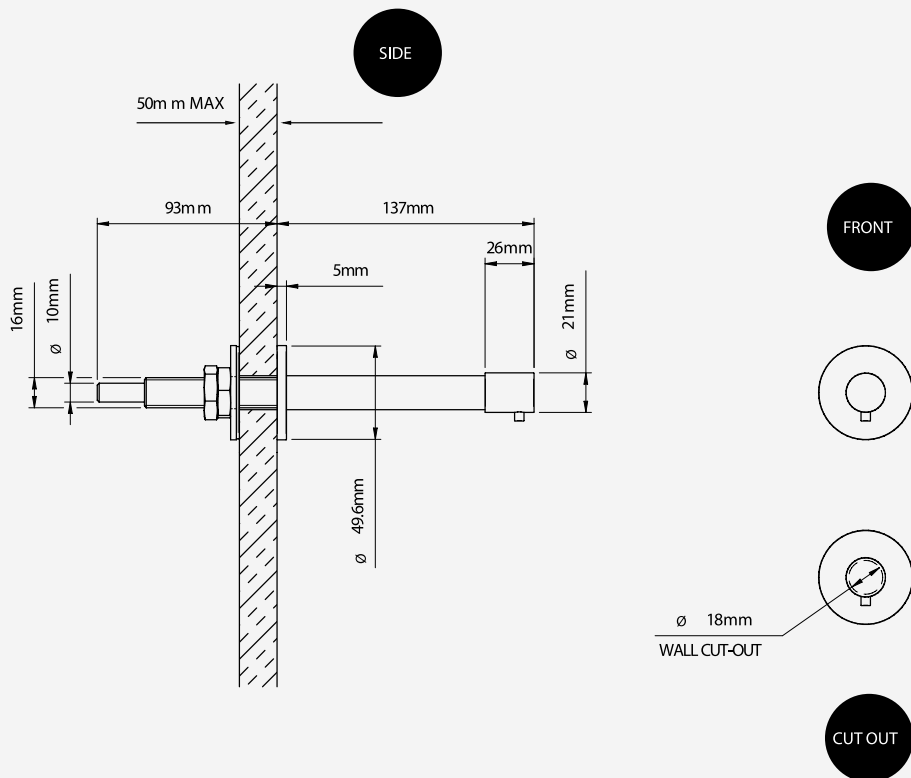

Spare parts

If a situation arises where you require replacement components outside of a maintenance contract, there may be provision to obtain spare parts. Providing the components are under warranty and the parts have become non-functioning during normal use within their assumed usable life, they may be replaced. Should a replacement mains power supply be required it is imperative that an identical type is used. Contact **The Splash Lab** for further information.

Related products



IR Sensor Tap
TSL.882



Universal Liquid Soap
TSL.ULS