


Wall Mounted Sensor Operated Soap Dispenser

TSL.937

Wall Mounted Sensor Operated Soap Dispenser - Battery Operated

Finish	Codes	LRV*
● Satin	TSL.937.CS	51
● Black	TSL.937.BK	3
● Brass	TSL.937.BR	40
● Copper	TSL.937.CP	19

Light Reflectance Value*



Technical Data

Weight	1.4kg
Recommended soap viscosity	Liquid soap:1-3000cPs Foam soap - <10cPs. Not suitable for alcohol gels or hand sanitisers.
Stainless steel grade	304 Stainless steel
Sensor range preset	75±15mm (Not adjustable)
Power supply - Battery	6V Type AA x 4 pcs Alkaline (not included) (Optional)
Pump Life Estimated	25,000 cycles
Standby power	0.3mA
Warranty	One Year Parts and Unlimited Online Support

Installation requirments

Reflective surfaces	Not to be installed above highly polished surfaces
Soap foam requirements	To utilise the TSL.AFS Aromatherapy Foam Soap the additional purchase of the TSL.P260056 Foam Pump is required.

Continued on next page

Included

Wall Mounted Sensor Operated Soap Dispenser

Dispenser cover

Screws

Baseplate

Soap tank cap

Soap tank -800ml


Valve (liquid, foam)

Control box

Warranty

1 Year limited - unlimited digital support

+ Technical drawing

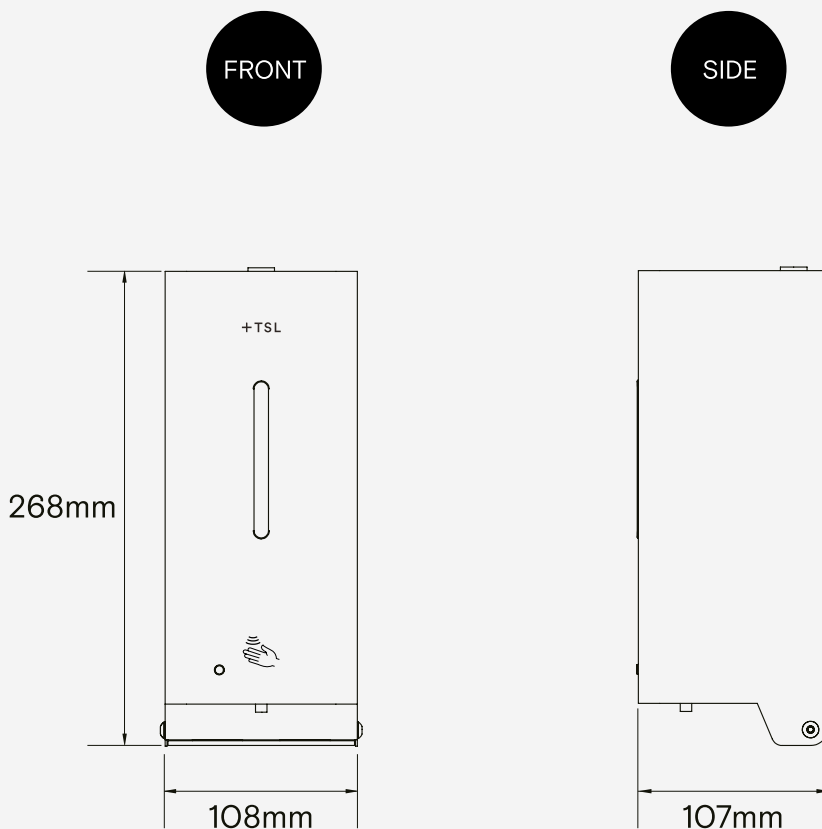

Spare parts

If a situation arises where you require replacement components outside of a maintenance contract, there may be provision to obtain spare parts. Providing the components are under warranty and the parts have become non-functioning during normal use within their assumed usable life, they may be replaced. Should a replacement mains power supply be required it is imperative that an identical type is used. Contact **The Splash Lab** for further information.

Part	Codes
Liquid Nozzle	TSLP.260055
Control box	TSLP.260057.

Related products



The Monolith M Series
TSL.M



IR Sensor Tap
TSL.882