

The Ribbon Soap Dispenser

TSL.RO11


Fully compatible with the The Splash Lab Soap Refill System, the automatic foaming nozzle reliably produces a precise dose of soap every time. The system is easily maintained, with the foaming nozzle simple and quick to replace.


| Finish | Codes | LRV* |
|--------------------------|-------------|------|
| Black | TSL.RO11.BK | 3 |
| Brass | TSL.RO11.BR | 40 |
| Satin | TSL.RO11.CS | 58 |
| Bronze | TSL.RO11.BZ | 17 |
| Copper | TSL.RO11.CP | 19 |
| Chrome | TSL.RO11.C | 75 |
| · | · | |


Light Reflectance Value*













Technical Data

| Weight | 1.5kg | |
|----------------------------|---|--|
| Recommended soap viscosity | Foam soap - <10cPs. Not suitable for alcohol gels or hand sanitizers. | |
| Stainless steel grade | 304 Stainless steel | |
| Sensor range preset | 70±15mm (Not adjustable) | |
| Power supply - Mains | Input: 100-240V ac; 50/60Hz Output: 6V DC; 1.5A, 9W max | |
| Power supply - Battery | 6V Type AA x 4 pcs Alkaline (not included) (Optional) | |
| Standby power | 9mA | |
| Warranty | One year limited warranty | |
| Recommended soap system | The Splash Lab automatic soap feed system | |
| | | |

Installation requirments

| Counter-top cut-out (dia) | Ø32mm | |
|------------------------------|--|--|
| Maximum countertop thickness | 35mm | |
| Anti-rotation collar | Included | |
| Reflective surfaces | Not to be installed above highly polished basins | |
| Access requirements | Pumps and transformers must be accessible at all times for servicing | |
| Cabling | Low voltage push fit connector to soap dispenser | |
| Power supply | Hard wired connection to mains branch circuit, It is recommended that the sensors are installed on their own circuit | |

Compliance & certificates

| CE | |
|------|--|
| RoHS | |
| UKCA | |

UK: +44 (0) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.

Included

The Ribbon Soap Dispenser

Dispenser head assembly

Anti-rotation collar (already installed)

Gasket

Anti-rotation washer

Fixing nut


Soap foaming pipe

Soap reservoir - 1500ml

Hex wrench/ Soap outlet

Soap foamer pump unit

Power supply unit

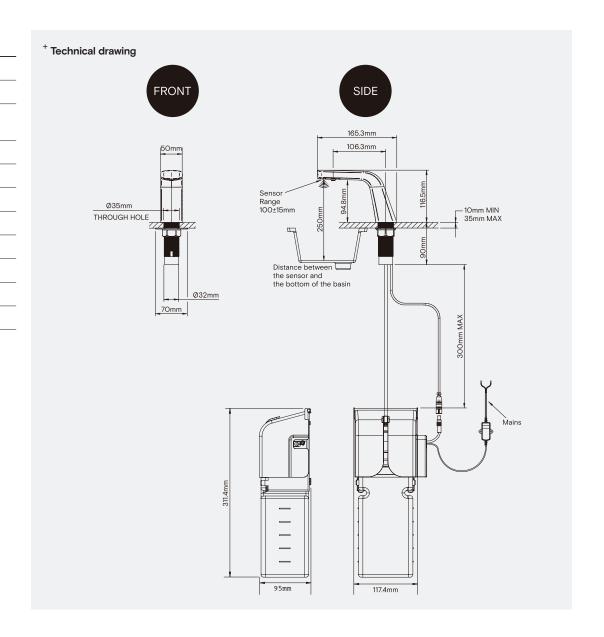

Warranty / Spare parts

For warranty terms and conditions please visit ${\bf www.thesplashlab.com}$

If additional spare parts are required and are not listed above, please contact us at info.uk@thesplashlab.com

Related products



The Ribbon Sensor Tap 2.0 TSL.RO21



The Ribbon Hand Dryer TSL.RO31



The Ribbon Basin TSL.R.041