

# Wall Mounted Sensor Operated Soap Dispenser

TSL.937


Wall Mounted Sensor Operated Soap Dispenser - Battery Operated

Finish	Codes	LRV*
<ul><li>Black</li></ul>	TSL.937.BK	3
Brass	TSL.937.BR	40
Satin	TSL.937.CS	58
<ul><li>Bronze</li></ul>	TSL.937.BZ	17
<ul><li>Copper</li></ul>	TSL.937.CP	19

Light Reflectance Value\*











# **Technical Data**

Weight	1.4kg	
Recommended soap viscosity	Liquid soap:1-3000cPs Foam soap - <10cPs. Not suitable for alcohol gels or hand sanitisers.	
Stainless steel grade	304 Stainless steel	
Sensor range preset	75±15mm (Not adjustable)	
Power supply - Battery	6V Type AA x 4 pcs Alkaline (not included) (Optional)	
Pump Life Estimated	25,000 cycles	
Standby power	O.3mA	
Warranty	One Year Parts and Unlimited Online Support	

# Installation requirements

Reflective surfaces	Not to be installed above highly polished surfaces
Soap foam requirements	To utilise the TSL.AFS Aromatherapy Foam Soap the additional purchase of the TSL.P260056 Foam Pump is required.

UK: +44 (0) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.

#### Included

Wall Mounted Sensor Operated Soap Dispenser

Dispenser cover

Screws


Baseplate

Soap tank cap

Soap tank -800ml

Valve (liquid, foam)

Control box

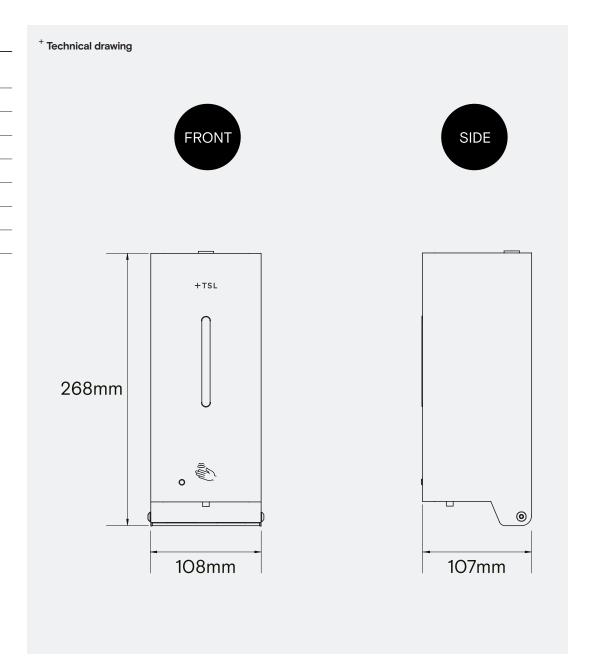

# Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com

If additional spare parts are required and are not listed above, please contact us at info.uk@thesplashlab.com

Part	Codes
Liquid Nozzle	TSLP.260055
Control box	TSLP.260057

### Related products



The Monolith M Series
TSL.M



150mm IR Sensor Tap TSL.884