

# Auto Soap Foamer

TSL.ASF

The TSL.AUTOSOAPFOAMER is a soap foaming system for automatic soap dispensers.

Compatible Soap Dispensers	Codes
1 Feed reservoir	TSL.270002
5 Feed reservoir	TSL.MF25-5
10 Feed reservoir	TSL.MF25-10

**+ Satin**



**Technical data**

Main power supply	110 – 240 Vac 50 – 60Hz
Internal fuse	3A
Maximum load	=7W / 580mA
Weight	700g
Unit size	130mm x 110mm x 46.2mm
Soap viscosity	1 – 5 cPs
Soap specification	The Splash Lab recommended soap only
Soap dose size	0,2 – 1.2ml (per activation)
Working temperature	5 – 45°C 41 – 113°F
Compatible dispensers	TSL.270002 TSL.MF25-5 TSL.MF25-10
Warranty	3 years parts / 1 year labour

Continued on following page

Included

Soap Foamer Unit  
TSL.ASF

Mounting bracket

Input plumbing

Output plumbing

Power supply (PSU)

Shut-off valve


T-joint

Elbow joint

12 to 8mm converter

8 to 6mm converter

+ Technical drawing

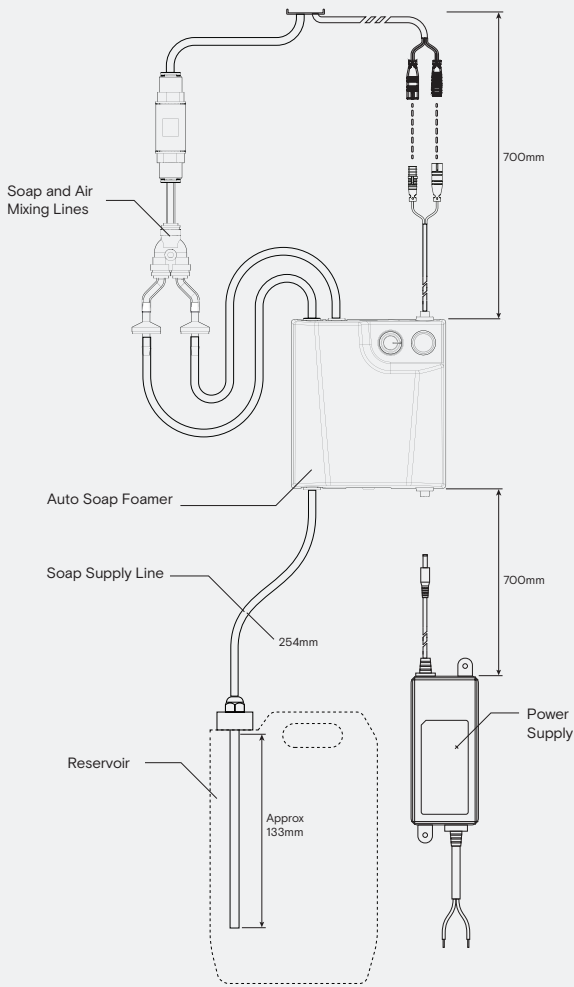

Warranty & Spare parts

For warranty terms and conditions please visit [www.thesplashlab.com](http://www.thesplashlab.com)  
If additional spare parts are required and are not listed below, please contact us at [info.uk@thesplashlab.com](mailto:info.uk@thesplashlab.com)

Related products



Aromatherapy Foam Soap  
TSL.AFS



TSL - 1 Feed Reservoir  
TSL.270002



TSL - 5 Feed Reservoir  
TSL.MF25-5