

# The Channel Soap Dispenser

TSL.CO41

Fully compatible with the The Splash Lab Soap Refill System, the automatic foaming nozzle reliably produces a precise dose of soap every time. The system is easily maintained, with the foaming nozzle simple and quick to replace.

Finish	Finish Codes	
<ul><li>Black</li></ul>	TSL.CO41.BK	3
Brass	TSL.CO41.BR	40
Satin	TSL.CO41.CS	58
<ul><li>Bronze</li></ul>	TSL.CO41.BZ	17
<ul><li>Copper</li></ul>	TSL.CO41.CP	19

Light Reflectance Value\*













## **Technical Data**

Weight	1.5kg		
Recommended soap viscosity	Liquid soap:1-3000cPs Foam soap - <10cPs. Not suitable for alcohol gels or hand sanitizers.		
Stainless steel grade	316 Stainless steel		
Sensor range Preset	70±15mm (Not adjustable)		
Power supply - Mains	Input: 100-240V ac; 50/60Hz Output: 6V DC; 1.5A, 9W max		
Power supply - Battery	6V Type AA x 4 pcs Alkaline (not included) (Optional)		
Standby power	9mA		
Recommended soap system	The Splash Lab automatic soapfeed system		
IP Rating	Spout: IPX3 Mechanism IPX3		

## Installation requirments

Wall cut-out (dia)	Ø22mm	
Maximum countertop thickness	5Omm	
Anti-rotation collar	Included	
Reflective surfaces	Not to be installed above highly polished basins	
Access requirements	Pumps and transformers must be accessible at all times for servicing	
Cabling	Low voltage push fit connector to soap dispenser	
Power supply	Hard wired connection to mains branch circuit, It is recommended that the sensors are installed on their own circuit	
Recommended Spacing	If the Chanel Soap Dispenser is installed with other units from the Channel System, it is advised to install the Tap in the centre, with dryer 200mm to the right and the Soap Dispenser 150mm to the left.	

## Compliance & certificates

CE		
UL		
RoHS		
UKCA		

UK: +44 (0) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.

#### Included

Dispenser head assembly

Pad (already installed)

Gasket

Washer

Fixing nut


Soap foaming pipe

Soap reservoir - 1500ml

Hex wrench / Soap outlet

Soap foamer pump unit

Power supply unit

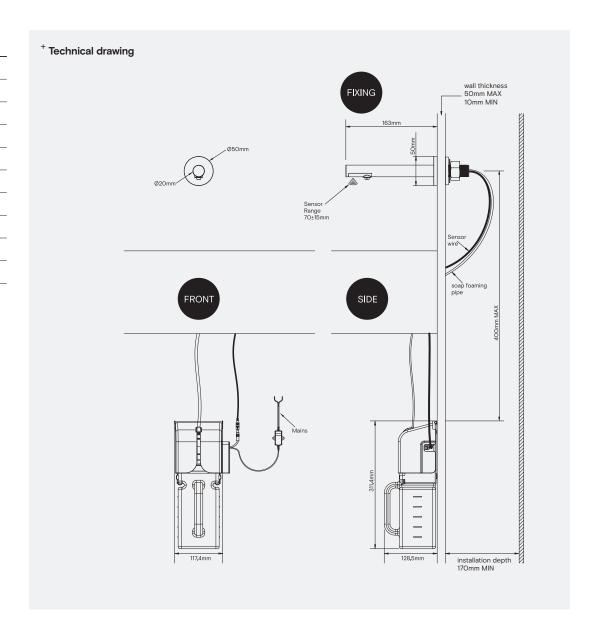

## Spare parts

For warranty terms and conditions please visit www.thesplashlab.com

If additional spare parts are required and are not listed above, please contact us at info.uk@thesplashlab.com

#### Warranty

1 year warranty on parts and labour

## Related products



The Channel Sensor Tap TSL.C.051.CS



The Channel Hand Dryer TSL.C.061.CS