

# Combination Units – Hand Dryer

TSL.CM9

The TSL.CM9 is an ultra slim body hand dryer with an overall recessing depth of 100mm, which will fit into a standard partition wall.

Finish	Codes	LRV*
● Satin	TSL.CM9.CS	58
● Black (Powder Coat)	TSL.CM9.BK	4
● Solid Surface	TSL.CM9.SO	*

Light Reflectance Value\* (Solid Surface LRV dependant on finish)

**+** TSL.CM9




## Technical Data

Weight	12.96Kg
Material	AISI 304 Stainless Steel / Solid Surface
Voltage/Frequency	220-240V 50HZ/60HZ
Sensor Range	100mm vertically under outlet
Drying Time	17 Seconds
Air Outlet Temperature	54°C (129°F) and 20°C (68°F) for ambient air
Air Speed	28m/s (91ft/s)
Noise Level	71dB
Nominal Power/Rates	1.8Kw at 230V


## Installation requirments

Cutout Dimensions	358mmx549mm
Minimum Void Depth	100mm
Fixing	Concealed screws through side flange to solid wall or timber framed aperture, or internal clamp to solid facing-board.

**Solid facing  
board construction**

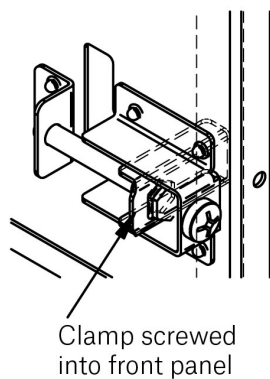


**Noggin frame and  
plasterboard facing  
construction**

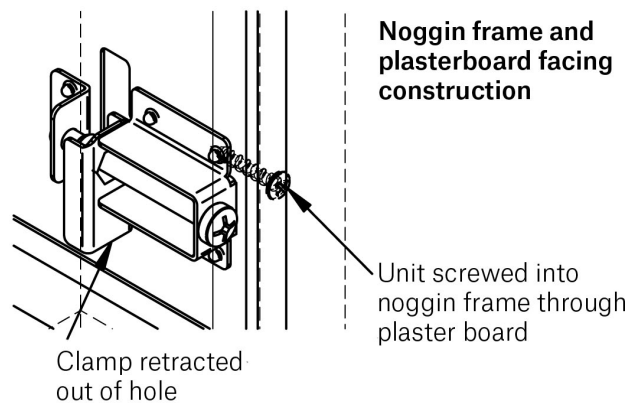

Key Components/Spare Parts

Combination Units - Waste Bin  
TSL.CM9

+ Technical drawing

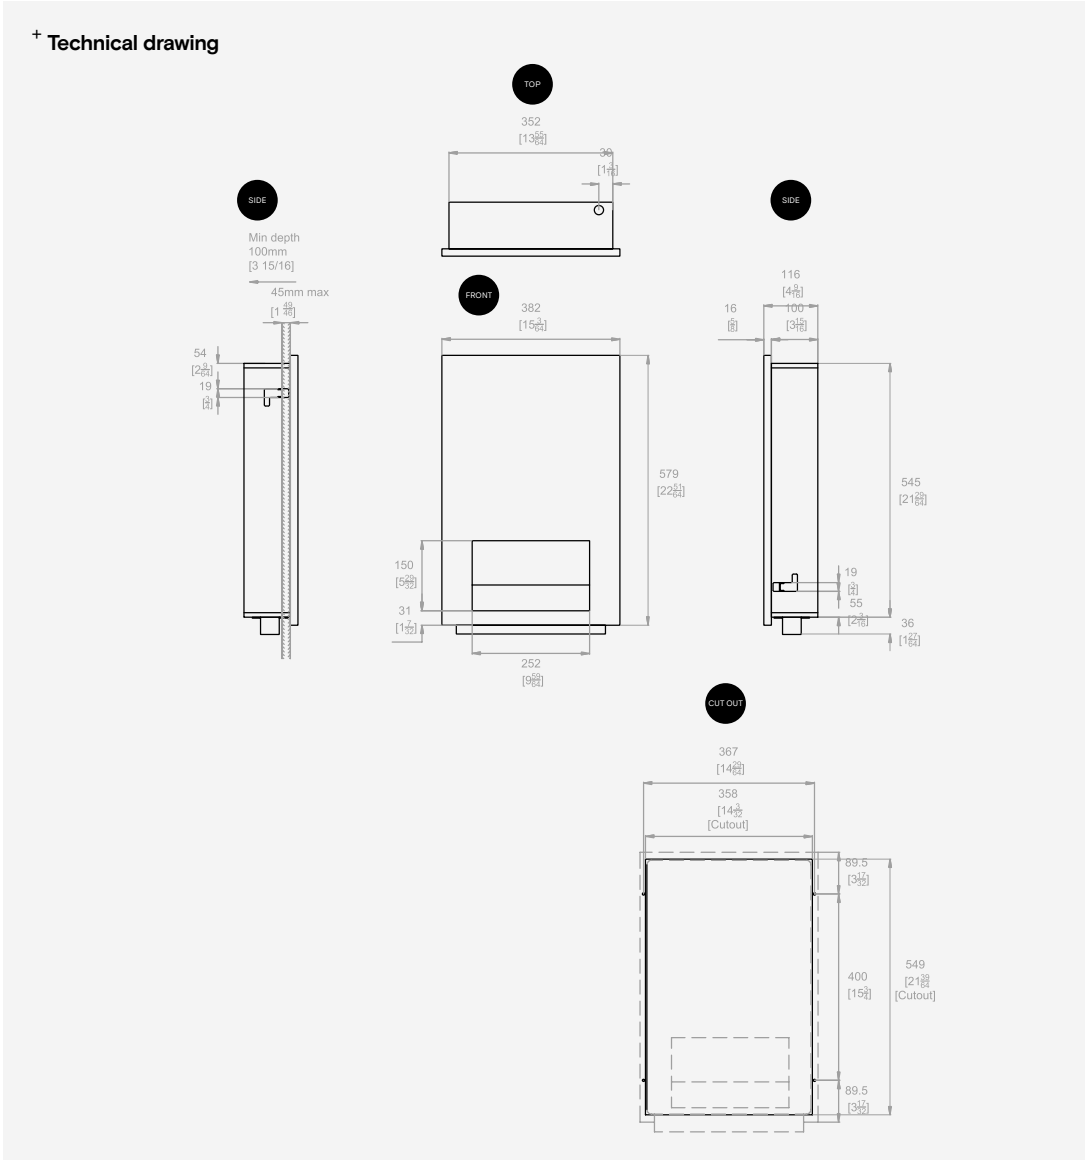

Warranty & Spare parts

For warranty terms and conditions please visit [www.thesplashlab.com](http://www.thesplashlab.com)  
If additional spare parts are required and are not listed above, please contact us at [info.uk@thesplashlab.com](mailto:info.uk@thesplashlab.com)

Related products



Combination Units - Paper Towel  
TSL.CM8



Combination Units - Waste Bin  
TSL.CM10



Combination Unit  
TSL.CM8910