



Deck Mounted Manual Tap

TSL.950

The TSL.950 is a deck-mounted manual tap that features a sleek spout, with an integrated lever operated mixer, available in a range of finishes.

Finish	Codes	LRV*
● Satin	TSL.950.CS	58
● Black	TSL.950.BK	3
● Brass	TSL.950.BR	40
● Copper	TSL.950.CP	19
● Bronze	TSL.950.BZ	17

*Light reflectance value



Technical Data

Body Material	AISI 304 Stainless Steel
Coating Type	PVD (colours only)
Aerator	Cascade
Water Pressure (Dynamic)	0.5 to 7.5 Bar [0.05 to 0.75MPa]
Water Temperature (Max)	60°C
Flow Rates	3.8 litres/minute - Cascade flow 1.9 litres / minute - Spray flow
Also available	1.35 litres / minute - Spray flow

Installation requirements

Countertop Cut-out size	Ø30mm
Maximum Countertop thickness	50mm
Water Supply	0.5 Bar is the recommended minimum pressure for the taps to operate effectively. 7.5 Bar is the maximum pressure for commissioning and is NOT recommended for general use. Gravity-fed systems may require a booster pump to achieve the optimal operating pressure. All pipework must be thoroughly cleaned and clear of any debris before connecting the tap.

Compliance certificates

BREEAM	Qualifies for up to 5 credits as part of water efficiency assessment
LEED	Water efficiency credits


BREEAM®



Included

Deck Mounted Manual Tap
TSL.950

+ Technical drawing

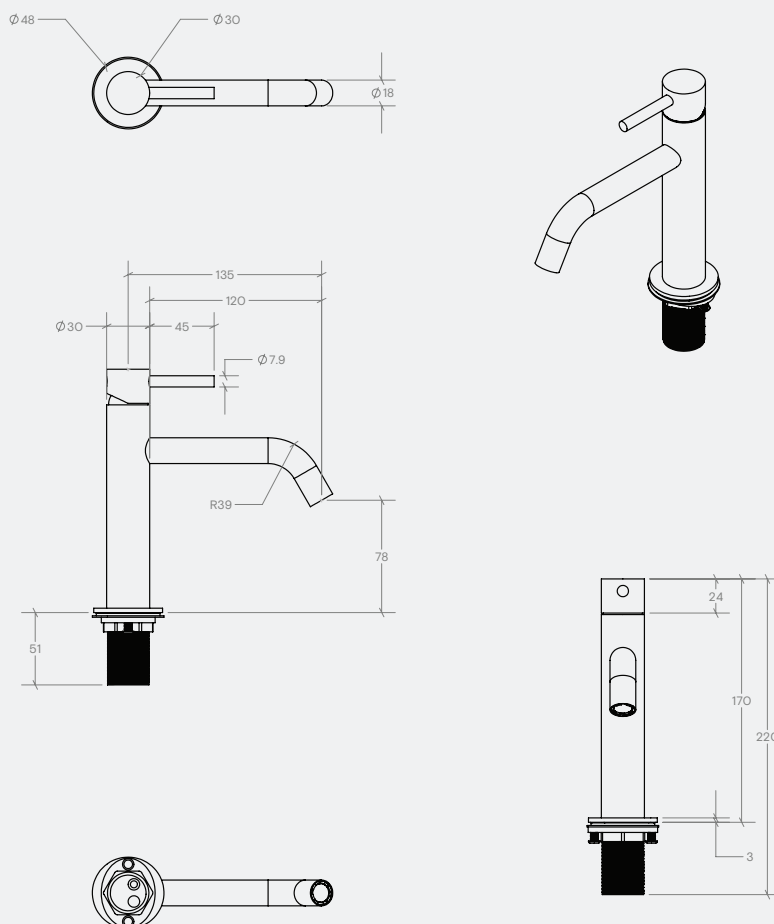

Warranty & Spare parts


For warranty terms and conditions please visit www.thesplashlab.com

If additional spare parts are required and are not listed below, please contact us at info.uk@thesplashlab.com

Related products



Straight Spout Tap Small
TSL.980



Wall-Mounted Manual Tap
TSL.970



Radius Auspex Tap 220mm
TSL.894