

Concealed Shower with Rail





TSL.SHW.O11

A minimalist stainless steel shower assembly with a two-way diverter for overhead, handheld flow and adjustable rail. Components are concealed behind the finished wall and offered in four PVD colours as well brushed satin.

- Doc M Compliant

Finish	Codes	LRV*
● Satin	TSL.SHW.O11.CS	3
● Black	TSL.SHW.O11.BK	40
● Brass	TSL.SHW.O11.BR	58
● Copper	TSL.SHW.O11.CP	17
● Bronze	TSL.SHW.O11.BZ	19

*Light reflectance value



Technical Data – Shower Head

Body material	AISI304 Stainless steel
Coating Type	PVD (colours only)
Minimum Pressure	1 Bar
Maximum Pressure	10 Bar
Recommended Working Pressure	2 – 5 Bar
Maximum Water Temperature	70°C / 176°F
Maximum Recommended Water Temperature	65°C / 149°F
Flow Rates	Flow rate: 12L/pm standard – 6L/pm , 8L/pm & 9L/pm optional available


Technical Data – Handset

Body material	AISI304 Stainless steel
Coating Type	PVD (colours only)
Minimum Pressure	1 Bar
Maximum Pressure	10 Bar
Recommended Working Pressure	2 – 5 Bar
Maximum Water Temperature	70°C / 176°F
Maximum Recommended Water Temperature	65°C / 149°F
Flow Rates	Flow rate: 12L/pm standard – 6L/pm , 8L/pm & 9L/pm optional available

Included

Ribbon Sensor Tap head

+ Technical drawing

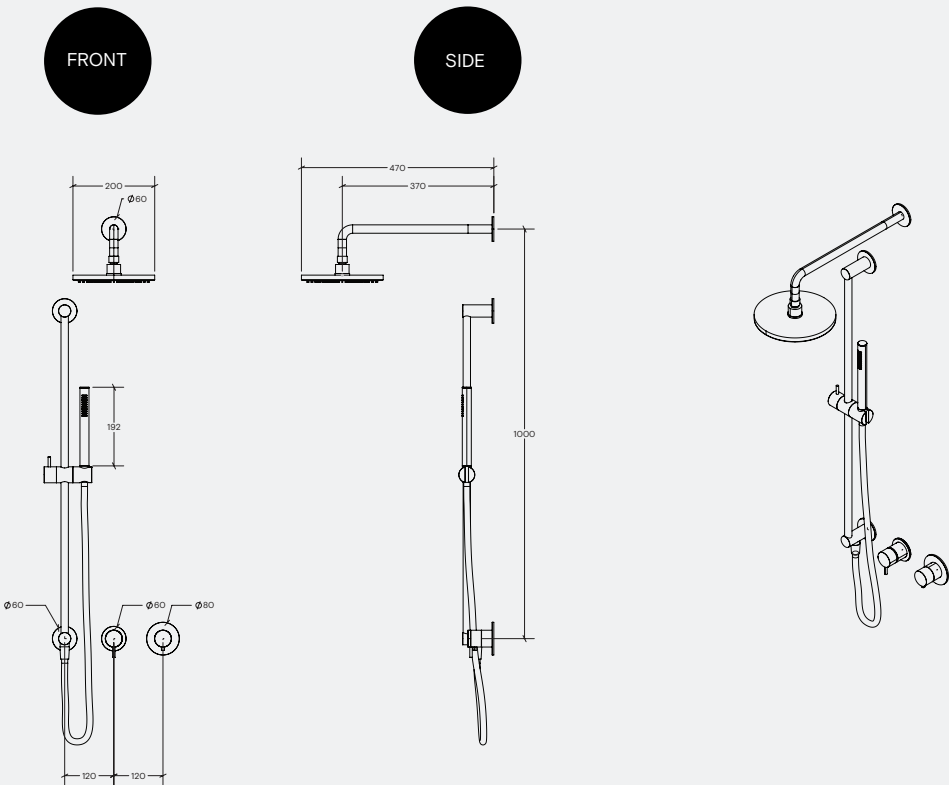

Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com
If additional spare parts are required and are not listed below, please contact us at info.uk@thesplashlab.com


Related products



Wall Mounted Manual Tap
TSL.970



Radius Auspex 150mm
TSL.895



Concealed Shower
TSL.SHW.001