


# Sensor Deck Mounted Tap / Large

TSL.960

The TSL.960 is a stainless steel deck mounted sensor tap, available in a variety of coloured finishes, with a sleek and minimalist design.

Finish	Codes	LRV*
● Satin	TSL.960.CS	58
● Black	TSL.960.BK	3
● Brass	TSL.960.BR	40
● Copper	TSL.960.CP	19
● Bronze	TSL.960.BZ	17
● Chrome	TSL.960.C	75

\*Light reflectance value

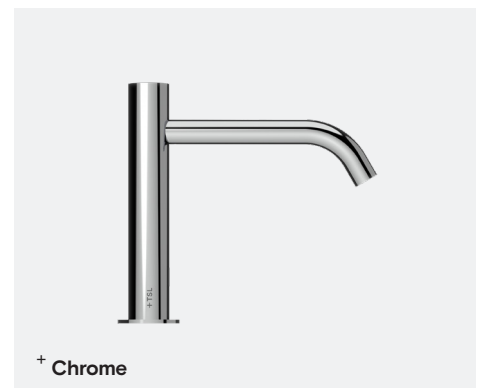



**Technical Data**

Weight	1.5kg
Material	AISI 304 Stainless Steel
Min.Max pressure	0.5 - 7.5 bar
Flow rate	3.8 litres/minute - Cascade flow 1.9 litres/minute - Spray flow
Also available	1.35 litres/minute - Spray flow
Aerator	Cascade flow
Coating type	PVD (colours only)
Max hot water temperature	60°C
Temperature control	Single feed pre-mixed required
Power supply (Battery)	6V CR-P2 Lithium Battery
Power supply (Mains)	100-240V; 1.5A; 50-60Hz PSU.
Output (Max)	6V; 6W max
Power consumption	< 80μA
Water ingress (PSU)	IP67
Cable lengths	Connection to sensor cable - 400mm Connection to fused supply - 1.5m
Sensor type	Infra red
Pre-set sensor range	120mm
Maximum sensor range	250mm
Comfort delay	2 seconds
Security time-out	30 seconds
Operating temperature	0 to 50°C
Response time (Max)	< 300ms

---

Continued on following page



## Installation requirements

Countertop Cut-out size	Ø35mm
Maximum Countertop thickness	50mm
Plumbing connection	1/2" BSP female connection required to solenoid valve
Power supply	3amp fused spur to be connected to IP68 transformer supplied; low voltage push fit connector to tap. For more reliable operation, it is not recommended that sensor taps are connected to an occupancy circuit. All connections must be in accord with the current local regulations in force.
Access Requirements	Solenoid/isolation valves must be accessible for initial installation & commissioning and for ongoing/routine maintenance.
Washroom Layout	Avoid installing the sensor tap directly opposite other sensor taps, soap dispensers, infrared devices or reflective surfaces. Careful consideration should be made when choosing the positioning of lighting and other reflective surfaces which may affect sensor performance.
Water Supply	0.5 Bar is the recommended minimum pressure for the taps to operate effectively. 7.5 Bar is the maximum pressure for commissioning and is NOT recommended for general use. Gravity-fed systems may require a booster pump to achieve the optimal operating pressure. All pipework must be thoroughly cleaned and clear of any debris before connecting the tap.

## Compliance certificates

BREEAM	Qualifies for up to 5 credits as part of water efficiency assessment
Certificate No 2012304	Certificate No 2012304
LEED	Water efficiency credits

BREEAM®



WRAS  
WATER REGULATIONS ADVISORY SCHEME

Continued on following page



- Included
- Solenoid Connector Cable  
TSLP.120032

Long Range IR Sensor  
TSLP.260045

Mains Power Supply 6V  
TSLP.270066


Solenoid Valve  
TSLP.260030

Aerator Key  
TSLP.260050

Aerator Cascade 3.8L/min Aerated  
TSLP.260062

Aerator Cascade 1.89L/min Aerated  
TSLP.260063

Basket Filter For Solenoid Valve  
TSLP.08530015

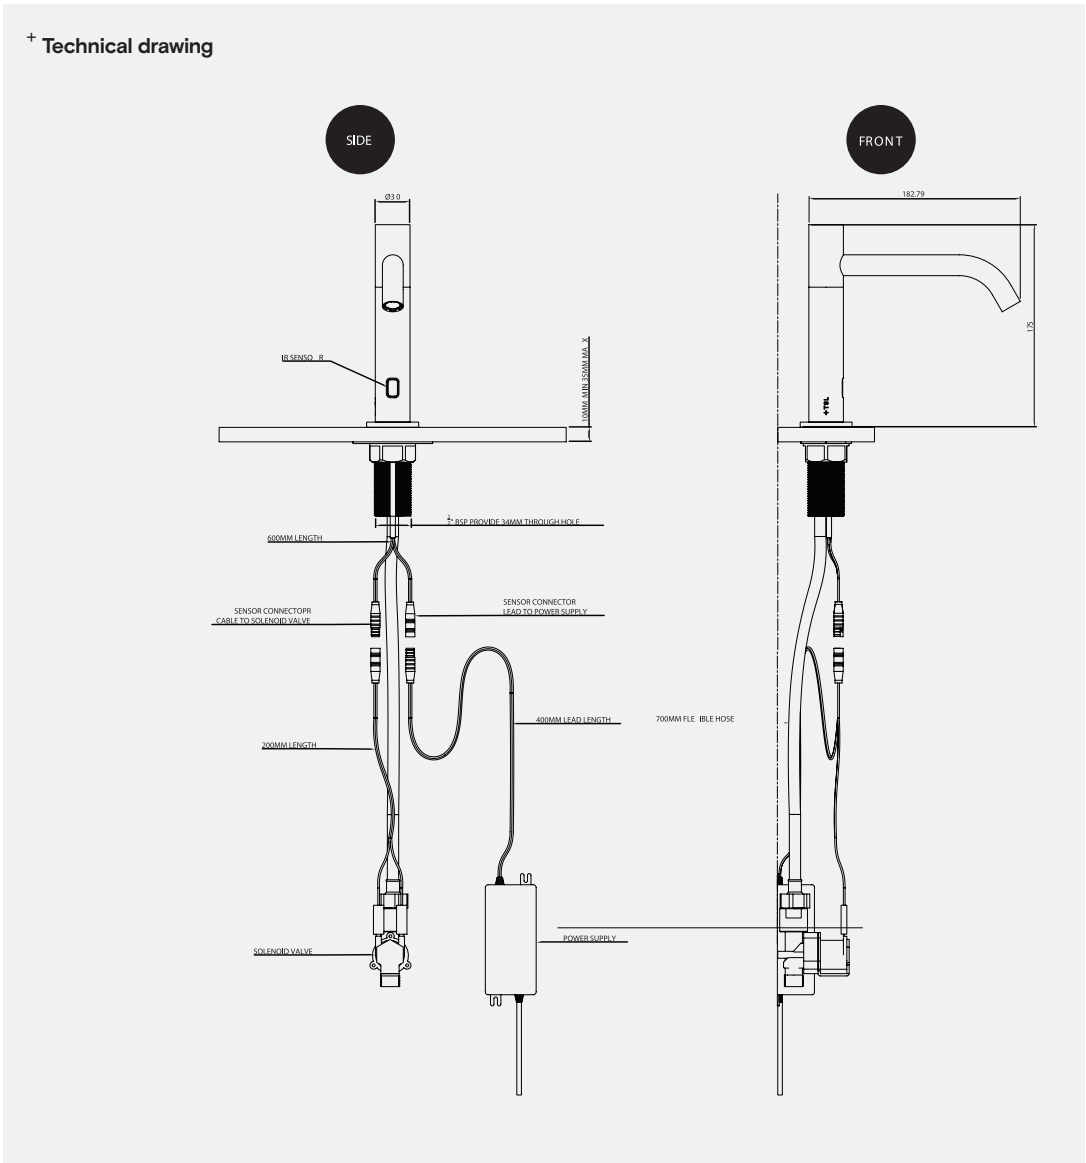

Warranty & Spare parts

For warranty terms and conditions please visit [www.thesplashlab.com](http://www.thesplashlab.com)  
If additional spare parts are required and are not listed below, please contact us at [info.uk@thesplashlab.com](mailto:info.uk@thesplashlab.com)



Code	Description
TSLP.EX130.CS	Extension kit - Satin
TSLP.EX130.BK	Extension kit - Black PVD
TSLP.EX130.BR	Extension kit - Brass PVD
TSLP.EX130.CP	Extension kit - Copper PVD
TSLP.EX130.BZ	Extension kit - Bronze PVD

Related products



Radius Auspex Tap 220mm  
TSL.894



Radius Auspex Tap 150mm  
TSL.895



Sensor Deck Mounted Tap Small  
TSL.990