

The Channel Hand Dryer

TSL.C.060

With an acoustically insulated and powerful blower unit, the Channel Hand Dryer offers a quiet user experience with fast and efficient drying times. Furthermore, with a touch free sink mounted system, there are no longer and drips carried across your washroom floors.

Finish	Codes	LRV*
● Black	TSL.C.060.BK	3
● Brass	TSL.C.060.BR	40
● Polished	TSL.C.060.C	58
● Brushed	TSL.C.060.CS	51
● Copper	TSL.C.060.CP	19

Light Reflectance Value*


+ Brushed



+ Black




+ Brass



+ Polished



+ Copper



Technical Data

Voltage	110 - 120 ac; 50/60Hz
Current draw	7.6-8.4A
Power consumption	0.84-1.0kW
Standby power	0.3- 0.4W
Drying time	<15 seconds
Weight	17lb
Material	AISI 316 stainless steel
Noise levels	68.6dB
Heating element	500W
Motor type	Brush type; dual ball bearings
Motor power	500-350W
Air speed	364 ft/s
Air flow	27.6 cu ft/min
Sensor range	5" +/- 1"
Security cut-off time	60 seconds
Motor thermal protection heater	Auto resetting thermostat set at 203° F
Thermal protection	Auto resetting thermostat set at 185° F Thermal cutout fuse set to 288° F
Insulation	Class 1
IP rating	IP35
Approvals	CE, UL, cUL, RoHS, ADA
Warranty	1 year parts and labor
Filter	1 year parts and labor 3M filter assembly (HEPA filter is available for this product, please enquire for technical information)
Force load capacity	88 - 110 lbs

Installation requirements

Wall-cut-out (dia)	Ø 1 3/16"
Maximum wall thickness	1 3/8"
Anti-rotation collar	Included
Reflective surfaces	Not to be installed above highly polished basins
Access requirements	Motor to be accessible at all times for servicing
Cabling	15A fused branch circuit is required
Power supply	It is recommended that the sensors are installed on their own circuit to avoid interference from other power demands. (i.e lighting)

Compliance & certificates

CE, UL, cUL, RoHS, ADA

Continued on next page

Included

Dryer head assembly

Hand dryer motor unit

Power cable

Pad

Gasket

Washer

Fixing nut

Angled pipe

Motor mounting screws

Hex wrench

Air hose

Not included

HEP filter


A 15A fused supply (must be provided prior to installation)

Optional faceplate (specified separately)

Warranty

1 Year parts and labor.

+ Technical drawing

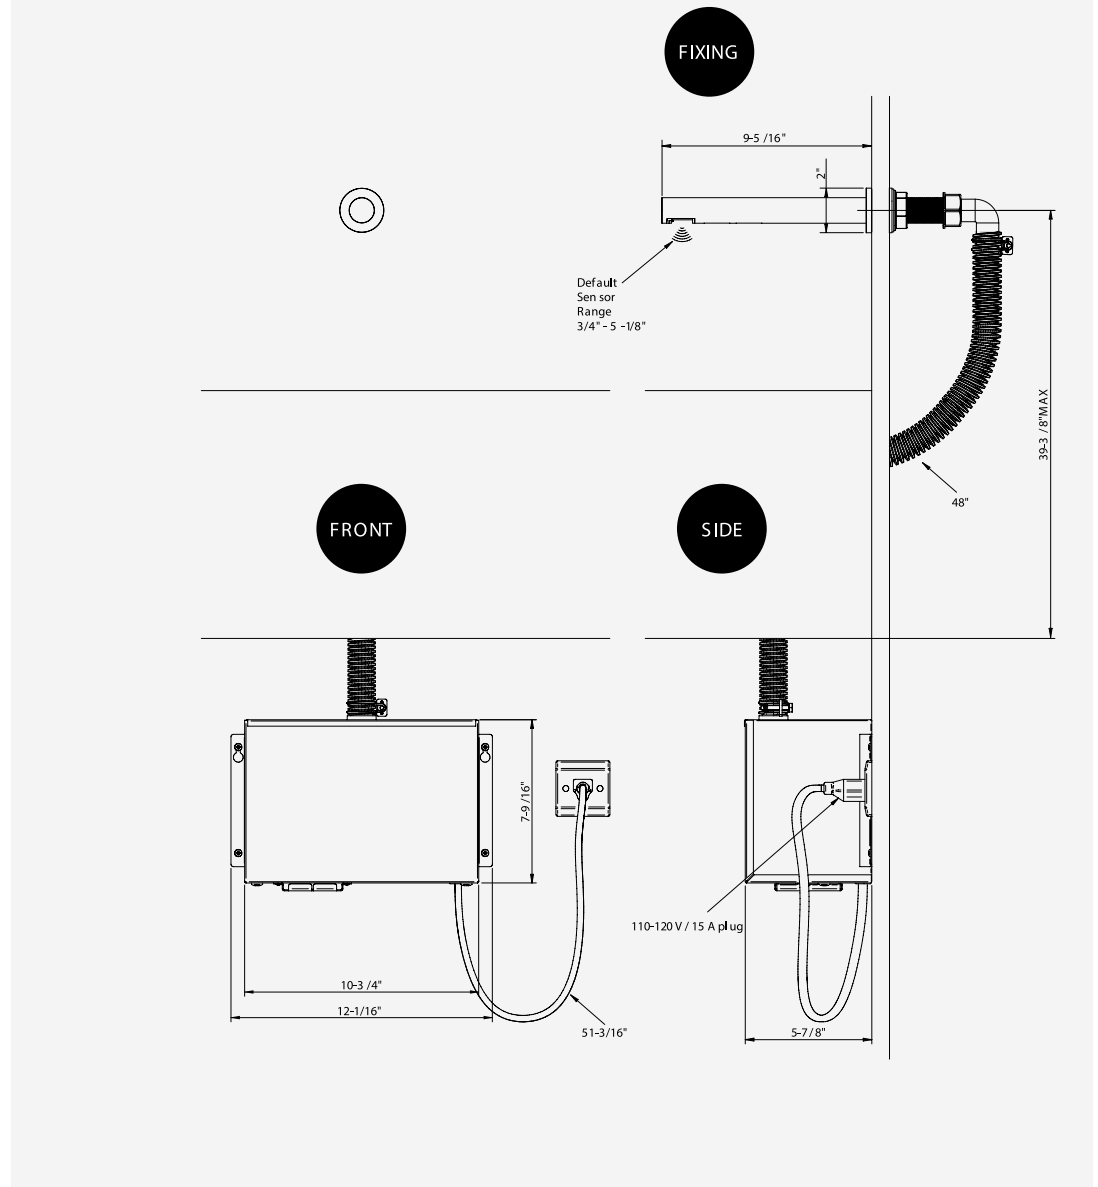

Spare parts

If a situation arises where you require replacement components outside of a maintenance contract, there may be provision to obtain spare parts. Providing the components are under warranty and the parts have become non-functioning during normal use within their assumed usable life, they may be replaced. Should a replacement mains power supply be required it is imperative that an identical type is used. Contact **The Splash Lab** for further information.

Part

Codes

Sensor

TSLP.230289

Related products



The Channel Faucet
TSL.C.050



The Channel Soap Dispenser
TSL.C.040