

Straight Spout Tap / Small

TSL.980

The TSL.980 is a stainless steel deck mounted sensor tap, available in a variety of coloured finished, with a sleek and minimalist design.

Finish	Codes	LRV*
● Satin	TSL.980.CS	58
● Black	TSL.980.BK	3
● Brass	TSL.980.BR	40
● Copper	TSL.980.CP	19
● Chrome	TSL.980.C	75

Light Reflectance Value*

+ Satin



+ Black



+ Brass



+ Chrome



+ Copper



Technical Data

Weight	3 lbs
Material	AISI 304 Stainless Steel
Min/Max pressure	4.25 - 108psi
Flow Rate	0.5 gpm standard. Options for 0.35 and 1 GPM available
Aerator	Cascade . ow
Coating Type	PVD (colors only)
Max hot water temperature	140°F
Temperature control	Internal mixer cartridge; not thermostatic
Power Supply (Battery)	Battery 6 V CR-P2 Lithium battery 6 Vdc, - battery pack not included
Power Supply (Mains)	110-230 Vac, 50-60Hz, 1.5A
Output (Max)	1A
Power Consumption	< 87% Active mode, 0.3W No load
Solenoid Valve	6V Latching
Water Ingress (PSU)	IP55
Cable Lengths	31 ½" - Power supply connection 31 ½" - Solenoid valve connection
Sensor Type	Infra red
Pre-set sensor range	8 11/16"
Maximum sensor range	9 11/16"
Comfort Delay	2 seconds
Security Time-out	30 seconds
Operating Temperature	32 to 122°F
Response Time (max)	< 300ms

Installation requirements

Countertop Cut-out Size	ø 1-3/8"
Maximum Countertop Thickness	2"
Plumbing Connection	1/2" BSP female connection required to solenoid valve

Power Supply 3amp fused spur to be connected to IP68 transformer supplied; low voltage push fit connector to tap. For more reliable operation, it is not recommended that sensor taps are connected to an occupancy circuit. All connections must be in accord with the current local regulations in force.

Access Requirements Solenoid/isolation valves must be accessible for initial installation & commissioning and for ongoing/routine maintenance.

Washroom Layout Avoid installing the sensor tap directly opposite other sensor taps, soap dispensers, infrared devices or reflective surfaces. Careful consideration should be made when choosing the positioning of lighting and other reflective surfaces which may affect sensor performance.

Water Supply 14psi is the recommended minimum pressure for the faucets to operate effectively. 108psi is the maximum pressure for commissioning and is NOT recommended for general use. Gravity-fed systems may require a booster pump to achieve the optimal operating pressure
All pipework must be thoroughly cleaned and clear of any debris before connecting the faucet.

Compliance & certificates

ADA compliant

ASME A112.18.1/CA B125.1-2018

NSF/ANSI 61-2017

NSF/ANSI 372-2016

NSF/ANSI/CAN 61-2022

International Plumbing Code (IPC) 2021, 2018, 2015, 2012 and 2009

International Residential Code (IRC) 2021, 2018, 2015, 2012 and 2009

Uniform Plumbing Code (UPC) 2021, 2018, 2015, 2012 and 2009

National Plumbing Code of Canada (NPC) 2020, 2015, 2010 and 2002

LEED.v4- Compliant for assessment for Water Saving and Efficiency

Continued on next page

Key Components/Spare Parts

Solenoid Connector Cable
TSLP.120032

Sensor Water & Air
TSLP.260014

Mains Power Supply 6V
TSLP.270066

Solenoid Valve
TSLP.120030

Aerator Key
TSLP.260050

Aerator Cascade 3.8L/min Airted
TSLP.260062

Aerator Cascade 1.89L/min Spray
TSLP.260063


Basket Filter for Solenoid Valve
TSLP.08530015

Optional Extras

Lithium Battery 6V
TSLP.270030

Battery Holder
TSLP.270029

+ Technical drawing

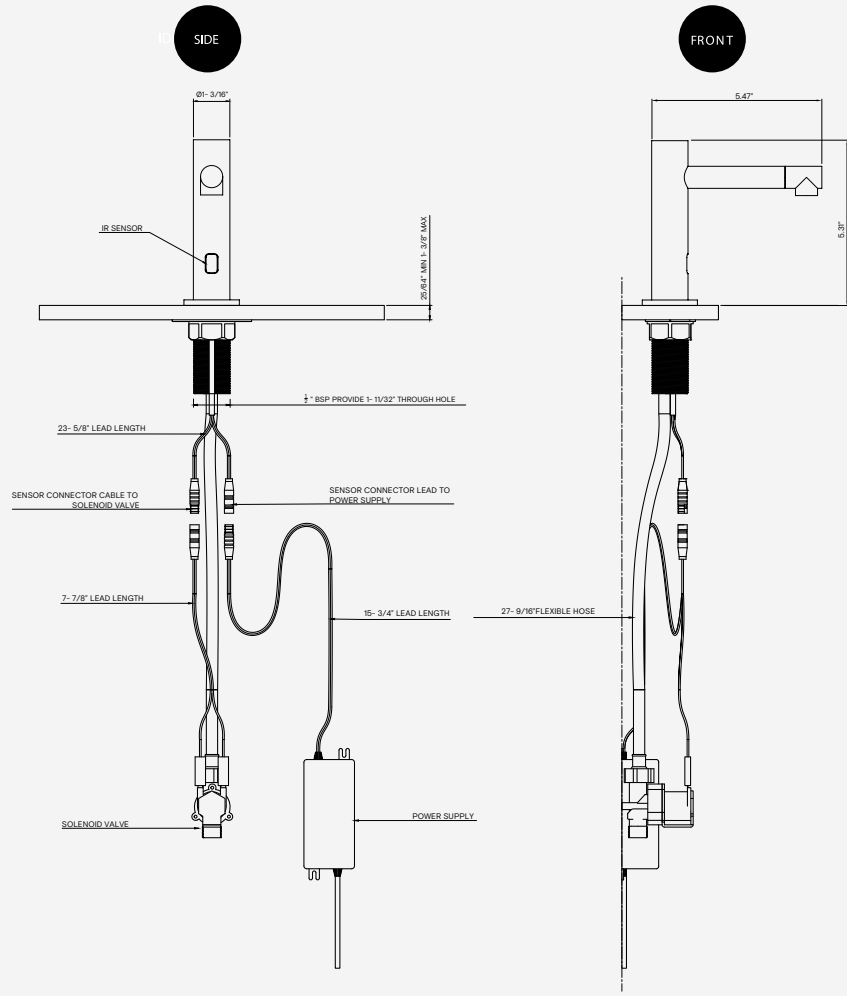

Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com/usa

If additional spare parts are required and are not listed above, please contact us at info.usa@thesplashlab.com

Part	Code
Solenoid Valve Sensor Wire	L120032
IR Sensor CI128 - Faucet	L260014
Solenoid Valve 1/2" BSP	L120030
Remote Sensor Controller	L230099

Related products



Sensor Deck Mounted Soap Dispenser
TSL.420



Deck Mounted Soap Dispenser
TSL.410



Straight Spout Tap / Large
TSL.940



Monolith A Series
TSL.MON.A