






The Ribbon Faucet

TSL.R.020

Deck mounted sensor operated faucet with robust body construction for all types of projects. Available mains or battery powered. To be used in conjunction with the Ribbon dryer and soap dispenser for optimum efficiency.

Finish	Codes
● Black	TSL.R.030.BK
● Brass	TSL.R.030.BR
● Satin	TSL.R.030.CS
● Copper	TSL.R.030.CP
● Chrome	TSL.R.030.C
● Bronze	TSL.R.030.BZ



Technical Data

Minimum operating pressure	7 - 87 psi dynamic pressure
Flow rate	0.35 GPM or 0.5 GPM (Other flow rates available upon request)
Weight	2 lb 3 oz
Material	AISI 304 stainless steel
Sensor range	Preset 5" (adjustable). Min range 3" +/-20% - Max range 5.9" +/-20%
Comfort delay	2 seconds
Security cut-off time	60 seconds
Power supply - mains	Input: 100 - 240V; 50 - 60Hz Output: 6C DC; 0.5A; 3W max.

Installation Requirements

Counter-top cut-out (dia)	1 3/8" diameter
Maximum countertop thickness	1 3/8"
Anti-rotation collar	Included
Reflective surfaces	Not to be installed above highly polished basins or waste outlets
Access requirements	Solenoids, isolation valves and transformers must be accessible at all times for servicing
Cabling	3 amp fused spur to IP68 rated transformer; low voltage push fit connector to faucet
Power supply	For the mains power option, it is recommended that the sensors are installed on their own circuit to avoid interference from other power demands.

Compliance & Certificates

ADA compliant
ASME A112.18.1 / CSA 8125.1-2018 Plumbing Supply Fittings
NSF/ANSI/CAN 61-2023 Drinking Water System Components - Health Effects
NSF/ANSI 372-2022 Drinking Water System Components - Lead Content
International Plumbing Code (IPC) - 2024, 2021, 2018, 2015, 2012 and 2009
International Residential Code (IRC) - 2021, 2018, 2015, 2012 and 2009
Uniform Plumbing Code (UPC) - 2021, 2018, 2015, 2012 and 2009
National Plumbing Code of Canada (NPC) - 2020, 2015, 2010 and 2002
LEED.v4 Compliant for assessment for Water Saving and Efficiency
BREEAM 5 credits
California Health and Safety Code 116875
S.3874 Reduction of Lead in Drinking Water Act

- Included**
-
- The Ribbon Faucet

 - Ribbon sensor faucet head

 - Mains power supply

 - Solenoid valve

 - Anti-rotation plate #1

 - Counter top gasket

 - Anti-rotation plate #2


 - Fixing nut

 - Flow restrictor

 - Flex hose - 300mm

- Not included**
-
- Sink

 - Premixed water (must be supplied prior to installation)

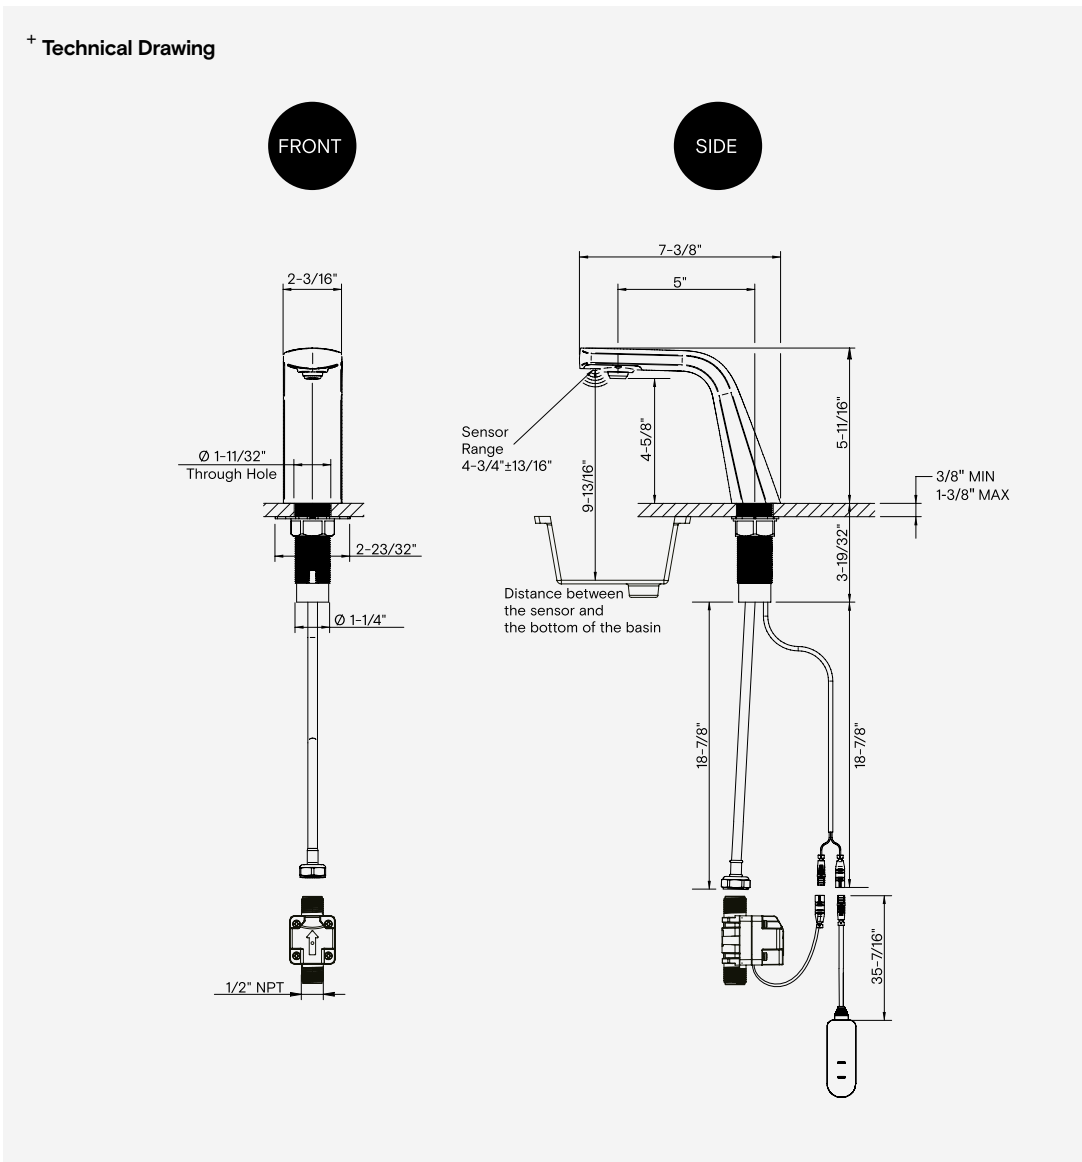

Warranty & Replacement Parts

TSL backs every fixture with a lifetime guarantee against material defect.
 For warranty terms and conditions please visit www.thesplashlab.com/usa/warranty
 For replacement parts, please contact The Splash Lab at info.usa@thesplashlab.com for further information.

Part	Code
Sensor Assembly	TSLP.230274
Battery Pack	TSLP.230281

Related Products

