

The Channel Faucet

TSL.C.050

Wall mounted sensor operated faucet with robust body construction for all types of projects. Available mains or battery powered. To be used in conjunction with the Ribbon dryer and soap dispenser for optimum efficiency.

Finish	Codes
● Black	TSL.C.050.BK
● Brass	TSL.C.050.BR
● Satin	TSL.C.050.CS
● Copper	TSL.C.050.CP
● Chrome	TSL.C.050.C
● Bronze	TSL.C.050.BZ


+ Satin



+ Black



+ Brass



+ Copper



+ Chrome



+ Bronze



Technical Data

Weight	2 lb 3 oz
Recommended soap viscosity	Foam soap - <10cPs. Not suitable for liquid soaps, alcohol gels or hand sanitisers.
Stainless steel grade	AISI 316 Stainless steel
Sensor range Preset	5-2 9/32"±19/32" (non adjustable)
Power supply - Mains	Input: 100 - 240V AC; 50 - 60Hz Output: 6V DC; 1.5A, 9W max
Power supply - Battery	6V Type AA x 4 pcs Alkaline (not included)
Standby power	9mA
Recommended soap system	The Splash Lab automatic soap feed system
Force load capacity	88 - 110 lbs

Installation Requirements

Wall cut-out (dia.)	7/8" diameter
Maximum Countertop Thickness	1 3/8"
Anti-rotation collar	Included
Reflective surfaces	Not to be installed above highly polished basins
Access requirements	Pumps and transformers must be accessible at all times for servicing
Cabling	IP68 rated transformer; low voltage push fit connector to soap dispenser
Power supply	Hard wired connection to mains branch circuit, It is recommended that the sensors are installed on their own circuit
Sensor distance	To avoid continuous dispensing, install this fixture with at least 7" of clearance beneath the sensor. Ensure the dispensing head is positioned over the interior plane of the basin.

Compliance & Certificates

CE

UL

cUL

RoHS

ADA

Included

Channel sensor faucet head

Mains power supply

Solenoid valve

Pad

Gasket

Washer

Fixing nut


Flow restrictor

Flex hose - 300mm

Not Included

Premixed water (must be supplied prior to installation)

Optional faceplate (specified separately)

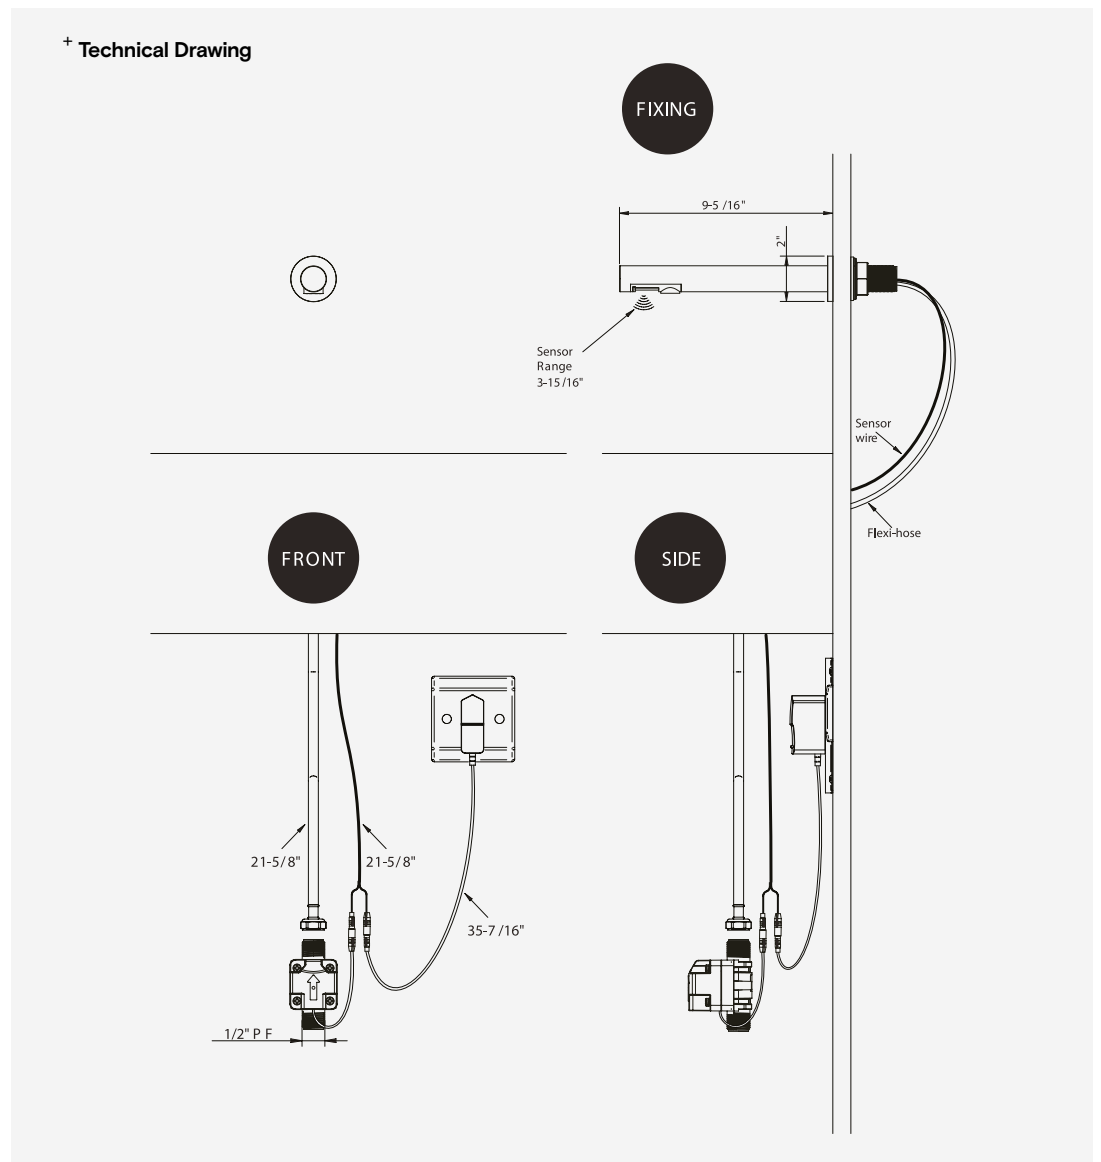

Warranty

TSL backs every fixture with a lifetime guarantee against material defect in the finish.

For warranty terms and conditions please visit www.thesplashlab.com/usa/warranty

Replacement Parts

Please contact The Splash Lab at info.usa@thesplashlab.com for further information.

Part	Codes
Sensor	TSLP.230288
Plug-in Power Supply	TSLP.230284

Related Products



The Channel Hand Dryer
TSL.C.060



The Channel Soap Dispenser
TSL.C.040