


The Ribbon Soap Dispenser

TSL.R031

With an acoustically insulated and powerful blower unit, the Ribbon Hand Dryer offers a quiet user experience with fast and efficient drying times. Furthermore, with a touch free sink mounted system, there are no longer any drips carried across your washroom floors.

Finish	Codes	LRV*
● Satin	TSL.R031.CS	58
● Black	TSL.R031.BK	3
● Brass	TSL.R031.BR	40
● Copper	TSL.R031.CP	19
● Bronze	TSL.R031.BZ	17
● Chrome	TSL.R031.C	75

*Light reflectance value

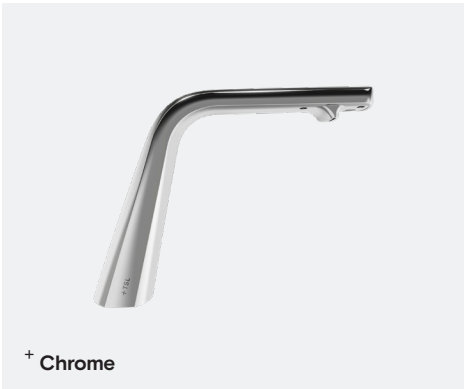

Technical Data

Weight	8kg
Material	304 Stainless steel
Voltage	220-240 ac; 50/60Hz
Current draw	3.8-4.2A
Power consumption	0.84-1.0kW
Standby power	0.3-0.4W
Drying time	< 15 seconds
Noise levels	70.6dC
Heating element	500W
Motor type	Brush type; dual ball bearings
Motor power	500-350W
Air speed	84 - 101 mis
Air flow	54 m3 /h
Sensor range	120±20 mm
Security cut-off time	60 seconds
Motor thermal protection	Auto resetting thermostat set at 95° C
Heater thermal protection	Auto resetting thermostat set at 85° C Thermal cutout fuse set to 142 ° C
Insulation	Class 1
IP rating	IP35
Approvals	CE, UL, cUL, RoHS, ADA
Filter	3M filter assembly (HEPA filter is available for this product, please enquire for technical information)

Installation requirements

Countertop Cut-out size	Ø32mm
Maximum Countertop thickness	35mm
Anti-rotation collar	Included
Reflective surfaces	Not to be installed above highly polished basins
Access Requirements	Motor to be accessible at all times for servicing
Cabling	8A fused branch circuit is required
Power supply	It is recommended that the sensors are installed on their own circuit to avoid interference from other power demands. (i.e lighting)


Compliance & certificates

CE,
UL
cUL
RoHS
ADA
UKCA

Included

- The Ribbon Hand Dryer
TSL.R031
- Dryer head assembly
- Hand dryer motor unit
- Power cable
- Anto-rotation collar (already installed)
- Gasket (already installed)
- Anti-rotation washer
- Fixing nut
- Motor mounting screws
- Hex wrench
- Air hose
- HEPA filter (Optional)

+ Technical drawing

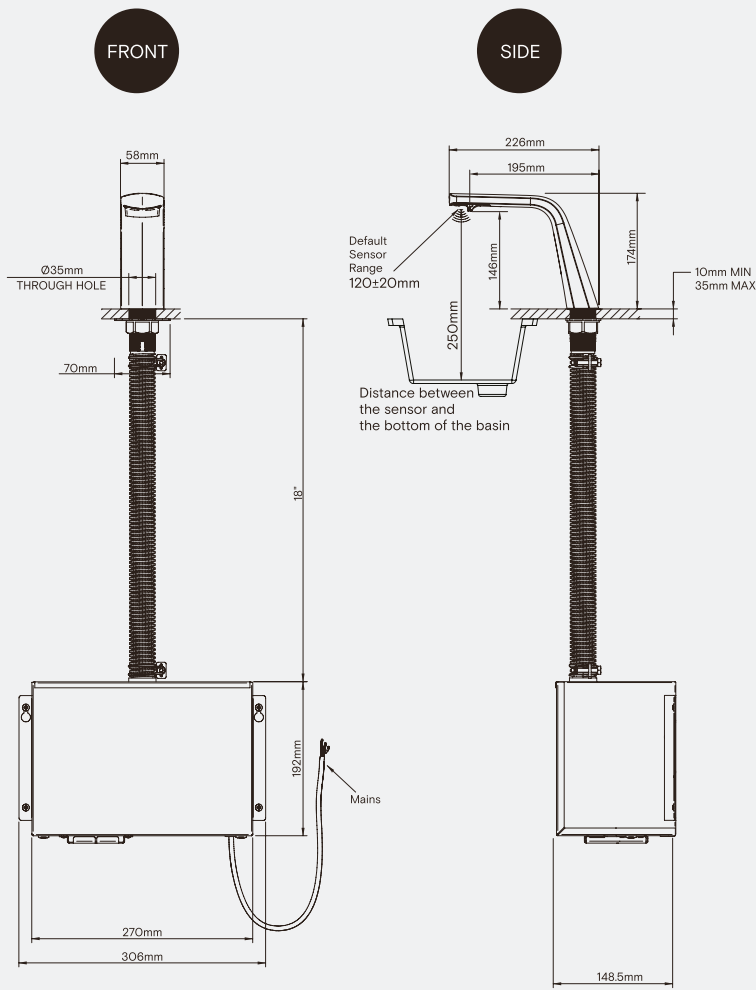

Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com
If additional spare parts are required and are not listed below, please contact us at info.uk@thesplashlab.com

Related products



Radius Auspex Tap 220mm
TSL.894



The Ribbon Sensor Tap 2.0
TSL.R021



The Ribbon Soap Dispenser
TSL.R011