

The Ribbon Soap Dispenser

TSL.RO31

With an acoustically insulated and powerful blower unit, the Ribbon Hand Dryer offers a quiet user experience with fast and efficient drying times. Furthermore, with a touch free sink mounted system, there are no longer any drips carried across your washroom floors.

Finish	LRV*	
Satin	TSL.RO31.CS	58
Black	TSL.RO31.BK	3
Brass	TSL.RO31.BR	40
Copper	TSL.RO31.CP	19
Bronze	TSL.RO31.BZ	17
Chrome	TSL.RO31.C	75

^{*}Light reflectance value













REV 2025 10-Sept UK: +44 (0) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.

Weight	8kg
Material	304 Stainless steel
Voltage	220-240 ac; 50/60Hz
Current draw	3.8-4.2A
Power consumption	O.84-1.0kW
Standby power	0.3-0.4W
Drying time	< 15 seconds
Noise levels	70.6dC
Heating element	500W
Motor type	Brush type; dual ball beatings
Motor power	500-350W
Air speed	84 - 101 mis
Air flow	54 m3 /h
Sensor range	120±20 mm
Security cut-off time	60 seconds
Motor thermal protection	Auto resetting thermostat set at 95° C
Heater thermal protection	Auto resetting thermostat set at 85° C Thermal cutout fuse set to 142° C
Insulation	Class 1
IP rating	IP35
Approvals	CE, UL. cUL. RoHS, ADA
Filter	3M filter assembly (HEPA filter is available for this product, please enquire for technical information)

Countertop Cut-out size	Ø32mm		
Maximum Countertop thickness	35mm		
Anti-rotation collar	Included		
Reflective surfaces	Not to be installed above highly polished basins		
Access Requirements	Motor to be accessible at all times for servicing		
Cabling	8A fused branch circuit is required		
Power supply	It is recommended that the sensors are installed on their own circuit to avoid interference from other power demands. (i.e lighting)		

Compliance & certificates

CE,			
UL			
cUL			
RoHS			
ADA			
UKCA			

REV 2025 10-Sept UK: +44 (0) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.

Included

The Ribbon Hand Dryer TSL.RO31

Dryer head assembly

Hand dryer motor unit

Power cable

Anto-rotation collar (already installed)

Gasket (already installed)

Anti-rotation washer


Fixing nut

Motor mounting screws

Hex wrench

Air hose

HEPA filter (Optional)

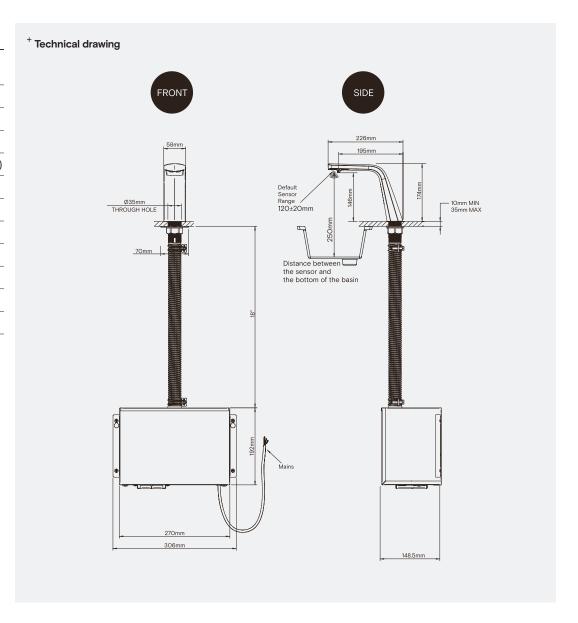

Warranty & Spare parts

For warranty terms and conditions please visit www.thesplashlab.com

If additional spare parts are required and are not listed below, please contact us at info.uk@thesplashlab.com

Related products



Radius Auspex Tap 220mm TSL.894



The Ribbon Sensor Tap 2.0 TSL.RO21



The Ribbon Soap Dispenser TSL.RO11

REV 2025 10-Sept UK: +44 (0) 161 482 7000 www.thesplashlab.com/uk info.uk@thesplashlab.com All things considered.