

# The Ribbon Soap Dispenser

TSL.R.010


Fully compatible with the The Splash Lab Soap Refill System, the automatic foaming nozzle reliably produces a precise dose of soap every time. The system is easily maintained, with the foaming nozzle simple and quick to replace.

Finish	Codes	LRV*
● Black	TSL.R.010.BK	3
● Brass	TSL.R.010.BR	40
● Satin	TSL.R.010.CS	58
● Bronze	TSL.R.010.BZ	17
● Copper	TSL.R.010.CP	19
● Chrome	TSL.R.010.C	75


Light Reflectance Value\*




+ Satin




+ Black




+ Brass



+ Bronze



+ Copper



+ Chrome

## Technical Data

Weight	2lb 3oz
Recommended soap viscosity	Foam soap - <10cPs. Not suitable for liquid soaps, alcohol gels or hand sanitizers.
Stainless steel grade	AISI 304 Stainless steel
Sensor range preset	5-29/32"±19/32" (nonadjustable)
Power supply - mains	Input: 100 - 240V AC; 50 - 60Hz Output: 6V DC; 1.5A, 9W max
Power supply - battery	6V Type AA x 4 pcs Alkaline (not included)
Standby power	9mA
Warranty	1 year limited warranty
Recommended soap system	The Splash Lab automatic soap feed system

## Installation requirements

Counter-top cut-out (dia)	Ø1 1/4"
Maximum countertop thickness	1 3/8"
Anti-rotation collar	Included
Reflective surfaces	Not to be installed above highly polished basins, or waste outlets
Access requirements	Pumps and transformers must be accessible at all times for servicing
Cabling	IP68 rated transformer; low voltage push fit connector to soap dispenser
Power supply	For the mains power option, it is recommended that the sensors are installed on their own circuit to avoid interference from other power demands.

## Compliance & certificates

CE

RoHS

UL listed

### Included

The Ribbon Soap Dispenser

Dispenser head assembly

Anti-rotation collar (already installed)

Gasket

Anti-rotation washer

Fixing nut

Soap foaming pipe

Soap reservoir - 0.4 gallons

Hex wrench/ Soap outlet

Soap foamer pump unit

Power supply unit

### Not included

Sink

Soap


Outlet (must be provided prior to installation)

Optional etching (specified separately)

### Warranty

1 Year parts and labor

### + Technical drawing

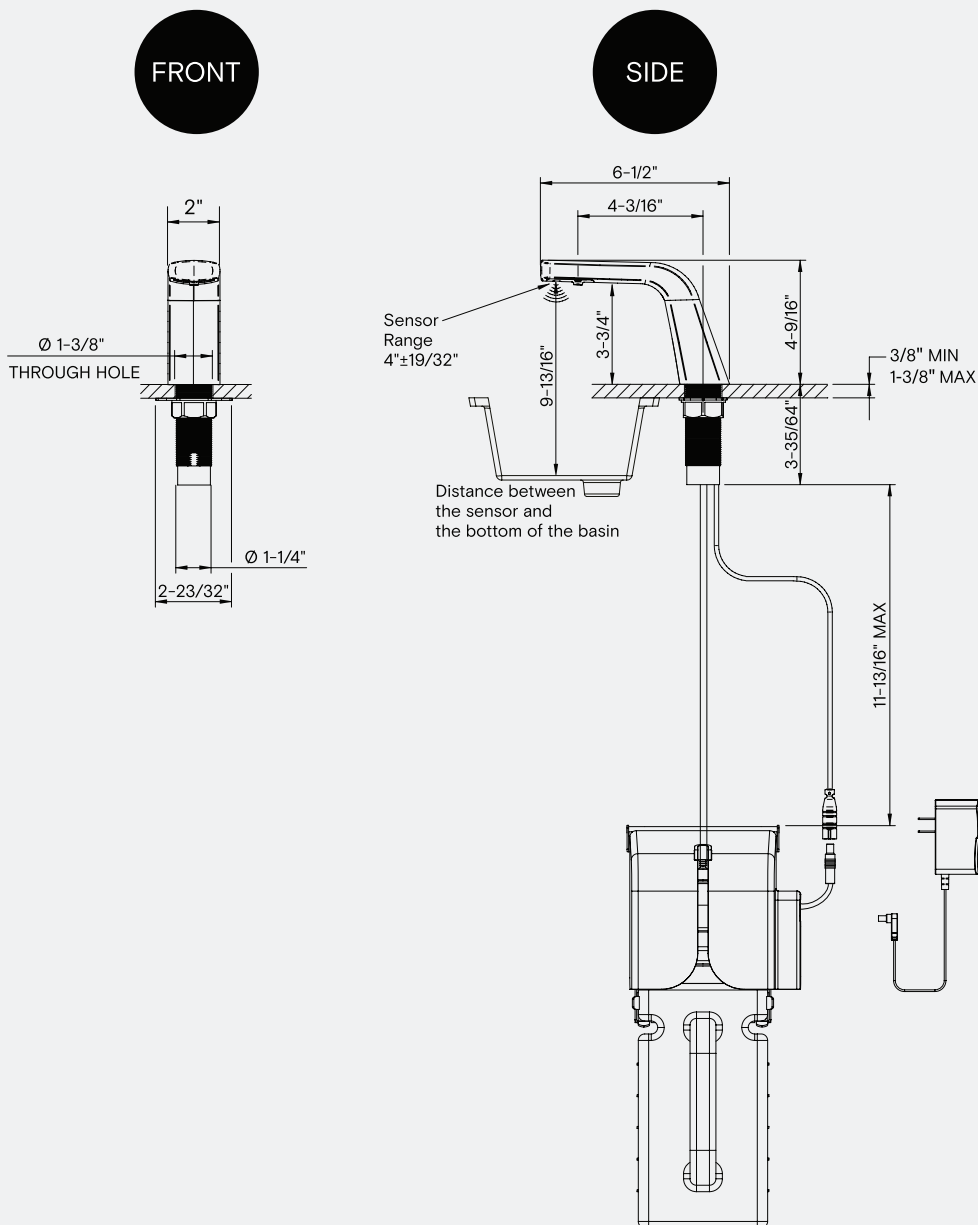

### Spare parts

For warranty terms and conditions please visit [www.thesplashlab.com](http://www.thesplashlab.com)

If additional spare parts are required and are not listed above, please contact us at [info.usa@thesplashlab.com](mailto:info.usa@thesplashlab.com)


### Related products




The Ribbon Soap Dispenser  
TSL.R021



The Ribbon Hand Dryer  
TSL.R030

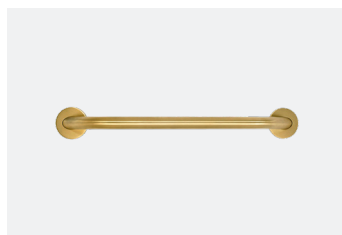

Radius ADA Grab Bars  
TSL.GR.45.36.BR

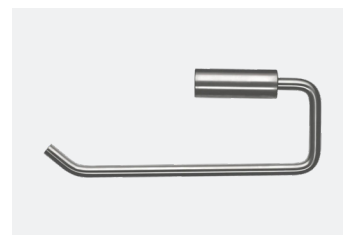

Double Toilet Roll Holder  
TSL.46.CS