


Metal Faced Access Panel

TSL.AP.M

The TSL.AP.M is a powder coated metal faced access panel with a picture frame, designed to fit into a structural membrane of a joint-less drywall + ceiling system.



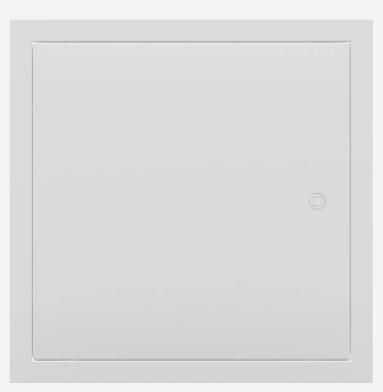

Technical Data

Material	20 gauge		
Color	RAL 9010 - (Other colors available upon request - info.usa@thesplashlab.com)		
Fire Rating	Non-fire rated, 1 hour fire rated, 2 hour fire rated options available		
Shape	Square		
Usage	Interior walls & ceilings		
Hinge	Concealed pin hinge		
Lock	Flush lock, opened by the provided multi-purpose key		
Frame	3/4" (Ensure there is enough clearance before installing)		
Depth	2"		
Included Components	3-way utility key, pop-out template		
-			

Nominal Sizes (H x W)	Structural Opening Size	FF Clamp Quantity	Weight (Ibs)
150x150 (5.9"x5.9")	155x155 (6.1"x6.1")	2	3.7
200x200 (7.9"x7.9")	205x205 (8.1"x8.1")	2	4.9
300x300 (11.8"x11.8")	305x305 (12"x12")	2	7.5
450x450 (17.7"x17.7")	455x455 (17.9"x17.9")	4	11.2
550x550 (21.7"x21.7")	555x555 (21.9"x21.9")	4	14.3
600x300 (23.6"x11.8")	605x305 (23.8"x12")	2	12.3
600x600 (23.6"x23.6")	605x605 (23.8"x23.8")	4	15.9

Custom sizes available. Please contact info.usa@thesplashlab.com

Installation Requirements


Make sure the structural opening is at least 1/4" larger than the back of frame size, back of frame size. E.G a 23 5/8" x 23 5/8" panel size requires a 23 7/8" x 23 7/8" hole size.

Open the panel using the budget lock key provided and place it into the aperture without opening the door.

Included

Metal Faced Access Panel TSL.AP.M

⁺ Technical Drawing

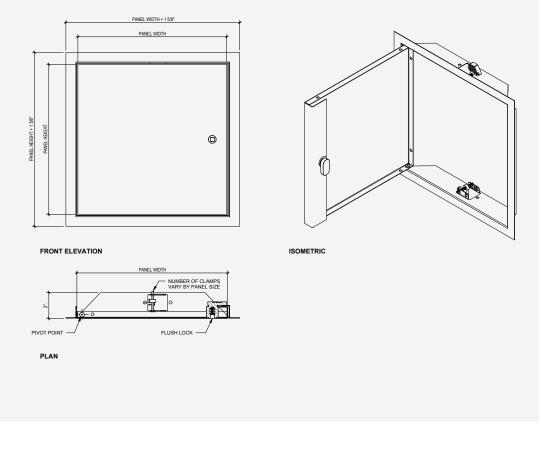

Warranty & Replacement Parts

TSL backs every accessory with a lifetime guarantee against material defect. For warranty terms and conditions please visit **www.thesplashlab.com/usa/warranty**

For replacement parts, please contact The Splash Lab at info.usa@thesplashlab.com for further information.

Related Products



Drywall Faced Access Panel TSL.AP.D



Tile Faced Access Panel TSL.AP.T